


ENERGY SAVING CARD SWITCH T 76 116

WIRING DIAGRAM

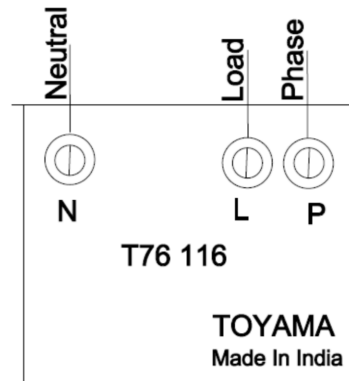

DESCRIPTION

Toyama card switches are intelligent lighting control system that provides energy saving solution to hotels and guest rooms. Key pocket switches use Photo emitter and Photo detector to process the data and control the loads. The device is incorporated with logical access system for security features.

APPLICATIONS

Key pocket switches can be installed in

- Hotels & Guest Rooms

TECHNICAL DATA

Power Source	230V/AC - 250V/AC
Power frequency	50-60 Hz
Power consumption of wall unit	< 20mw
Rated load	30A
Delay time to switch OFF	30 sec ± 15 sec.
Installation height	4 feet optimum
Operating Temperature	-10 to + 55°C

NOTE: SUITABLE FOR

- Mounting metal box for the device - 2 Module (75mmX75mmX50mm)
- Use 1.5 Sq.mm flexible wires for Phase, Neutral & Load connections