

ARC 600

Quick Start Guide

Items included in ARC 600 lighting kit:

LED Fixture:

- "V" Series 4000K 90+ CRI Spectrum

Power System:

- 600 Watt LED Driver (120-250 VAC Input)
- C-13 AC Power Cord

Hanging System:

- Metal 'V' Hanger (2pcs)
- Adjustable Ratcheting Cords (2pcs)

Please review safety / warning sheet before proceeding!
Fully assemble lighting fixture and connect all cabling before applying AC Power

Step 1) - Power System Assembly

- (a) Attach the AC Power Cord to the AC connector on the ARC Fixture

(a)




Step 2) Assemble and Attach Adjustable Hanging Kit

- Attach the 'V' Hanger to the side plates of the fixture
- Attach the Ratcheting Cords to the 'V' Hanger



Positioning & Coverage

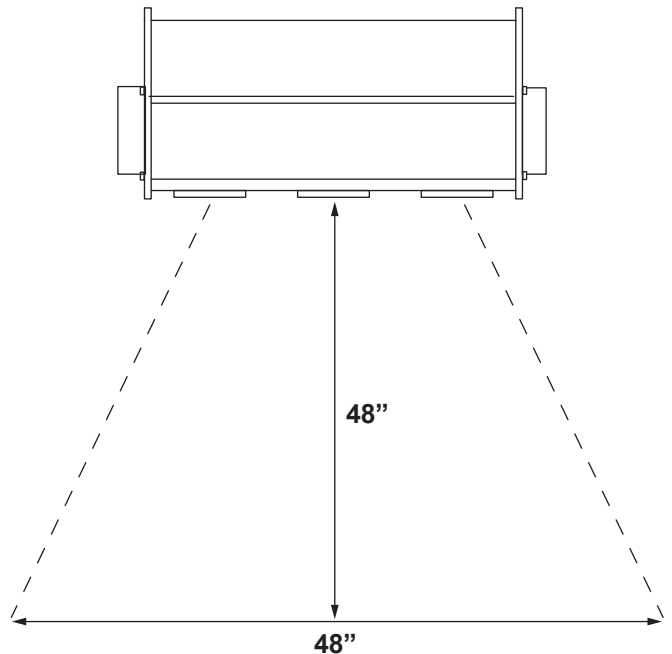

Note: Fixture should be positioned a minimum of 24 inches above crop canopy. For best coverage, maintain a 48 inch distance.

Step 3) Hang and Secure Light Fixture

- Using the Ratcheting Cords, hang the lighting fixture in the desired location.
- Make sure the suspension points are adequately strong to hold the lighting unit.
- **Each suspension points should be rated to hold a minimum of 40lbs.**

Step 4) Apply AC Power

- Plug in the AC Power Cord to a 120 VAC wall GFCI outlet.

WARNING: Always use a Ground Fault Circuit Interrupter (GFCI) outlet to prevent accidental injury or death.
Be careful to not look directly at the light when powered on to avoid eye damage.

For more information or help, please contact info@hortled.com