


- * 2 Lichtschranken
- * 2 photoelectric cells
- * 2 cellule photoélectr.
- * 2 fotocellule

LW	D	A	E	Glasdicke C Glass thickness C Epaisseur du verre C Spessore del vetro C		
				ESG	IV 5/6/5	VSG
800	940	1'060	315	10	16	10/14/16
900	1'040	1'160	340	10	16	10/14/16
1'000	1'140	1'260	365	10	16	10/14/16
1'100	1'240	1'360	390	10	16	10/14/16
1'200	1'340	1'460	415	10	16	10/14/16
1'300	1'440	1'560	440	10	16	10/14/16
1'400	1'540	1'660	465	10	16	10/14/--
1'500	1'640	1'760	490	10	16	10/14/--
1'600	1'740	1'860	515	10	16	10/--/--

Hinweis/Note/Remarque/Nota

Montagevarianten
 Assembly versions P 13.12.01
 Variantes de montage P 13.12.02
 Variante di montaggio

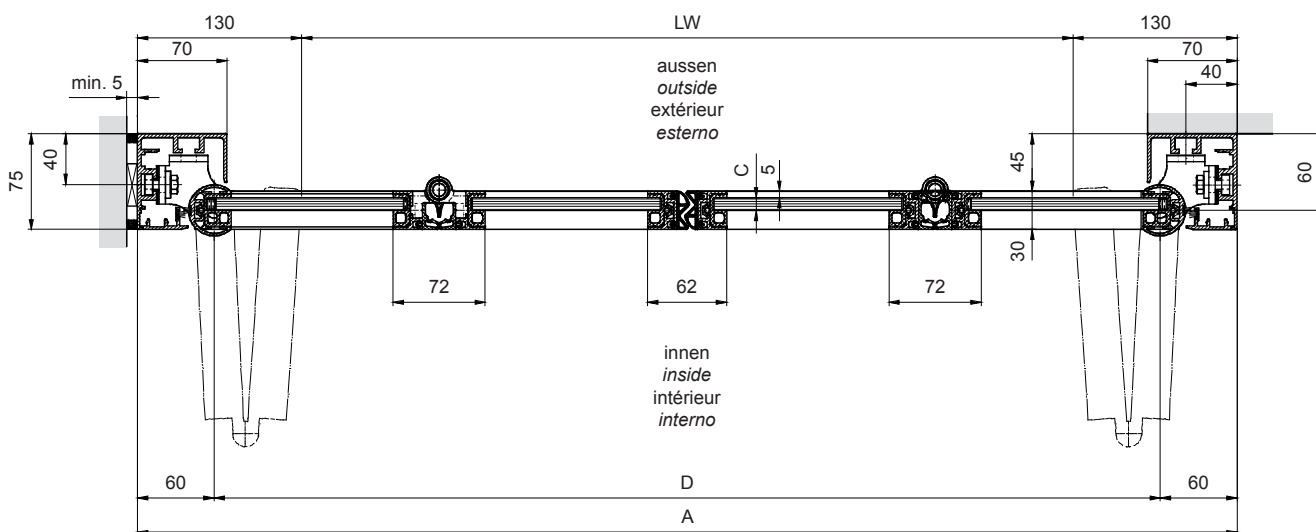

GILGEN
DOOR SYSTEMS

Faltflügeltür
 Folding wing door
 Porte à vantaux pliants
 Porta a battenti pieghevoli

FFM Durchgehende Bodenführung
 Continuous bottom guideway
 Guidage continu au sol
 Guida a pavimento continua

P 13.03.01

Änderungen vorbehalten
 Masse in mm 2002.02