

# SkyBay™ 3

LL2LHB3D150 Series LED Battens



## SkyBay 3 Features at a Glance

- Range: 21,000Lm, 150W
- Up to 140Lm/W
- LM80 projected LED life > 100,000 hours
- Colour Temperature: 5000K
- Frosted diffuser, Beam angle 120°
- Colour rendering CRI > 80
- Cast Aluminium with Black powder coat finish
- IP65 Protection rating - ideal for outdoor (all weather) locations
- IK08 impact rating
- 1.5m of UV Resistant flex and plug
- 1-10V dimming capability as standard
- Optional bracket for surface mounting
- Fully recyclable
- Fully Australian Approved
- Seven Year Warranty

## Dimming and Control



SkyBay 3 products are 1-10V dimmable as standard. DALI dimming optional. Better control your powered environment and minimise energy costs using the AUDACY advanced wireless control system. Contact LUMEX for further information.

## Unrivalled Efficiency

SkyBay 3 products utilise the latest developments in LED and offer among the highest energy to light conversions currently available - up to 140Lm/W.

## Environment and Safety

SkyBay 3 products are fully recyclable with no glass to break, no dangerous chemicals, and no risk from exposed voltages.

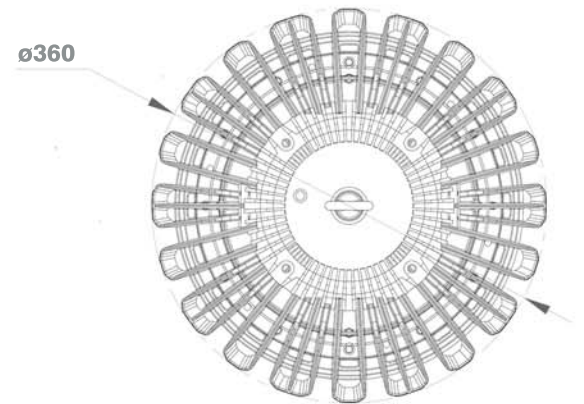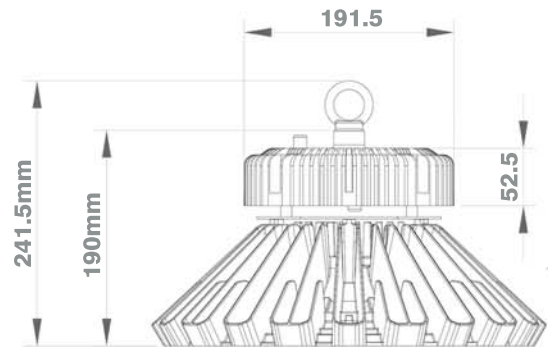

## Catalogue Number Guide: SkyBay 3

Example: Lumex SkyBay 3, 150W, 1-10V Dimmable, 120° Beam Angle, 4000K LL2LHB3D150C

Product Group		Group Designation		Dimmable		Watts		Colour Temperature		Diffuser	
Skybay	LL2	LED Highbay 3	LHB3	1-10V Dimmable	D	150W	150	5000K	C	Clear	
										Opal	L
										Prismatic	P



CUSTOMER SERVICE  
1300 897 287

skslighting.com.au



# SkyBay™ 3

LL2LHB3D150 Series LED Batters



## Physical

**Height:** 241.5mm  
**Height (w/ mounting bracket):** 265mm  
**Diameter:** 360mm  
**Weight:** 5.8kg

## Control and Programming

**Dimming:** 1-10V as standard

## Construction

**Colour:** Black  
**Body:** Die-cast aluminium  
**Lens:** Clear acrylic  
**Impact Rating:** IK08  
**Protection Rating:** IP65

## Connection

**Power Connection:** Direct connection or flex and plug

## Output

**Luminous Flux 5000K:** 21,000Lm  
**Efficacy:** up to 140Lm/W  
**Beam Angle:** 120°  
**CRI:** >80

## Electrical

**Input Voltage:** 220-240 Vac  
**Typical Total Power:** 150W  
**Power Factor:** 0.90

## Thermal

**Storage Temperature:** -20°C to +70°C  
**Operating Range Tc:** -40°C to +60°C  
**Humidity (non-condensing):** 15-95%

## Certificates

**EMC:** AS/NZS CISPR15 (C-Tick)  
**Electrical Safety:** AS/NZS 60598.2.1, AS/NZS 4417 (RCM)

Specifications subject to change without notice.



CUSTOMER SERVICE

1300 897 287

skslighting.com.au

