


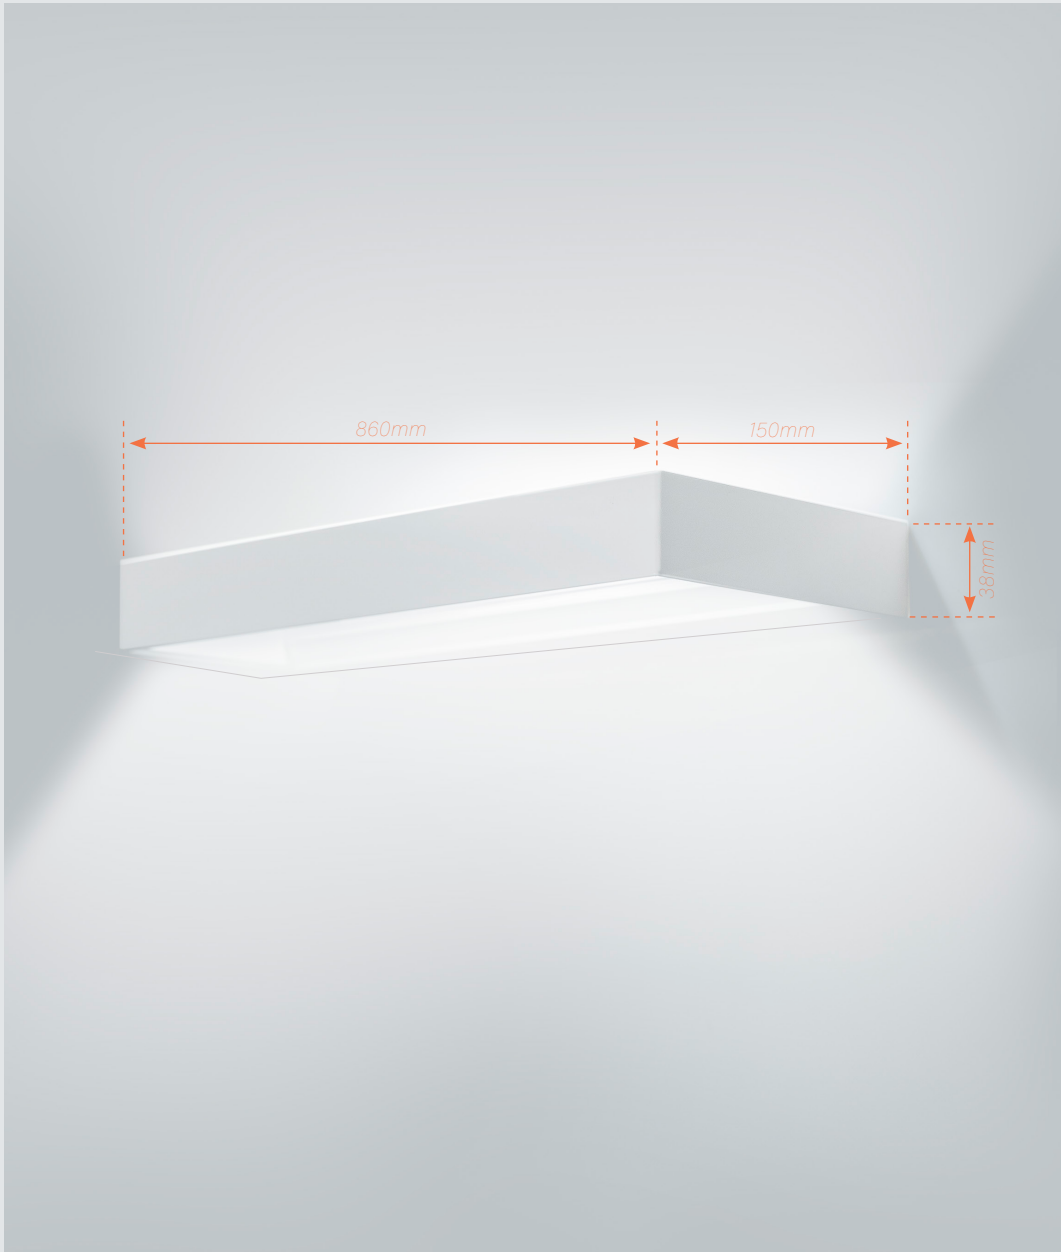

| CODE          | DRIVER       | POWER  | KELVIN  | CRI | Colour   |
|---------------|--------------|--------|---------|-----|----------|
| MLWLXXXXXXXXX | 11 non dim   | 45 45W | 27 2700 | 90  | 1 white  |
|               | 12 dali      | 90 90W | 30 3000 | 90  | 2 black  |
|               | 61 phase dim |        | 40 4000 |     | 3 silver |

# MILANO L

Aluminum extrusion up and down wall lamp. Glare free, highest export light acryl. Long lumen maintenance of 50000 hrs (L80 B 10). SDCM:3 allowing a consistent white light color between modules and over their lifetime. Driver included.

Anbauleuchte für Wandmontage mit zwei Lichtaustritten. Acryl, brillantes blendfreies Licht. Lebensdauer ca. 50000 Stunden(L80 B10). SDCM:3 LED-Chips, garantieren eine konstante Farbtemperatur über die gesamte Lebensdauer. Inkl. elektronischem Treiber.

WALL LAMP

## Technical Data


| model      | Milano L             |                  |         |
|------------|----------------------|------------------|---------|
| colour     | white, black, silver | lifetime L80 B10 | 50000 h |
| beam angle | 120°                 | warranty         | 5 years |
| material   | aluminum             | energy class     | A+      |



## Versions

|                         | CRI | 2700K  |            |
|-------------------------|-----|--------|------------|
| LED efficiency (system) | 90  | 8039lm | 90W 89lm/W |
|                         |     | 3000K  |            |
|                         |     | 8465lm | 90W 94lm/W |
|                         |     | 4000K  |            |
|                         |     | 8747lm | 90W 97lm/W |

## Beam angle

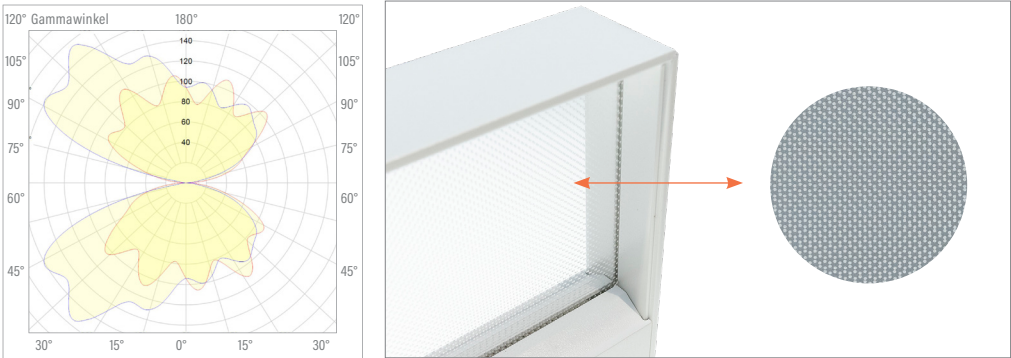

pointed glass, glass colour: clear