


ASTRO / TRACK SPOTLIGHT LUMINAIRE



TECHNICAL DATA

• Luminaire source	LED COB, Citizen
• Luminaire system wattage*	10W ~ 30W
• Luminaire luminous flux*	90lm ~ 2700lm
• Luminaire efficacy (avg.)	90lm/W (4000K)
• Correlated colour temperature*	3000K, 4000K, others on request
• Chromaticity tolerance	4 MacAdam
• Colour rendering index	Ra≥90
• Beam	15°~60° adjustable
• Service lifetime*	>50,000h L70/B50
• Ingress protection	IP20
• Power factor	≥0.90
• Operating voltage	220-240V AC, 50/60Hz
• Operating temperature	-20°~45°C
• Protection class	I
• Finish	Satin white (RAL9016), satin black (RAL9005)
• Construction	Aluminium housing, polycarbonate
• Warranty*	5 years
• Luminaire termination	3-circuit track adaptor
• Lighting control	Integrated phase-cut dimmable ECG standard

ORDER DATA

Model	System wattage	Colour temperature
ASTRO-65-10W-3K-D	10W	3000K
ASTRO-65-10W-4K-D	10W	4000K
ASTRO-80-25W-3K-D	25W	3000K
ASTRO-80-25W-4K-D	25W	4000K
ASTRO-100-30W-3K-D	30W	3000K
ASTRO-100-30W-4K-D	30W	4000K


Specify **-WHT** for white finish; **-BLK** for black finish

FEATURES

- High luminous efficacy up to 90lm/W, high colour rendering Ra≥90
- Adjustable beam angle 15°~60° via integrated snoot rotation/focus lensing
- Adjustable lighting orientation, 350° rotatability & 90° tilt adjustable
- Integrated phase-cut dimmable standard

OPTIONS/ACCESSORIES

- White and black finish options

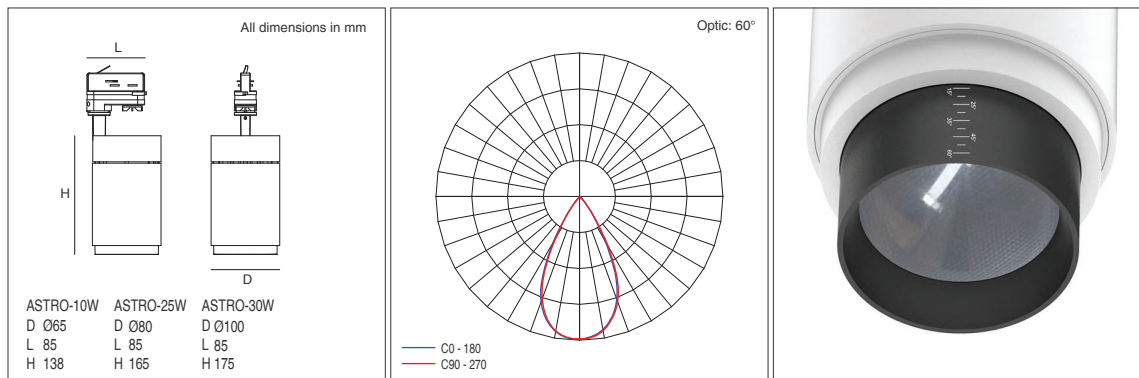

*Stated power consumption and luminous flux luminaire specification subject to tolerance of ±10%, correlated colour temperature tolerance of ±150K. All values based on ambient temperature of 25°C unless otherwise stated. Warranted against faulty workmanship and/or performance deficiencies for duration of stated warranty period, subject to terms and conditions. LOWA Lighting reserve the right to make specification changes without prior notice.