



The Beauty of
Imperfection

Grid

The 'GRID' is the hero of the show, either with the smooth texture or with the finest sand blasting technique, gently roughing its surface.

Material: Hand-Made Concrete


Use: Interior / Exterior use for Walls Cladding & Flooring

Thickness: 20 mm - 3/4"




Grid// Family tiles


Grid4 - EN4034

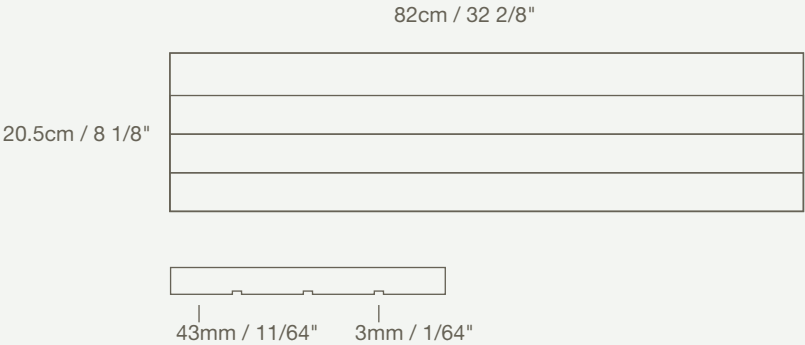

Grid16 - EN4036/8 (20/30 mm)

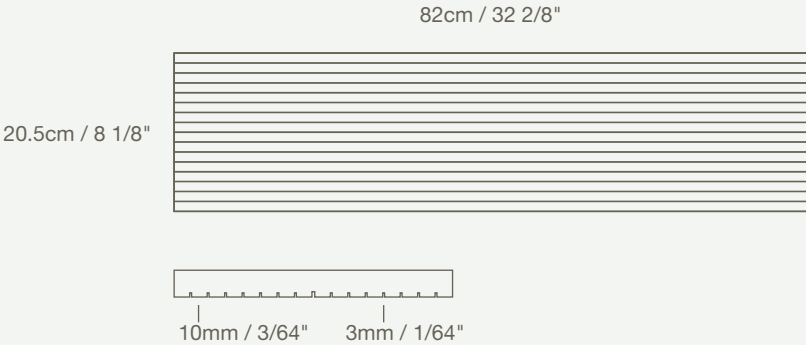


Grid8- EN4035

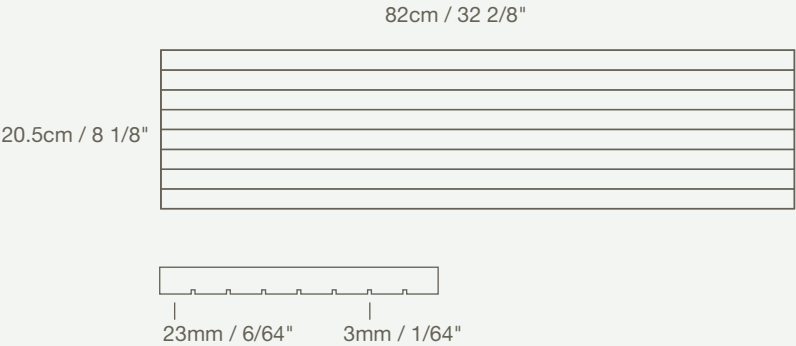


Grid // Fixed combination

Layout option #1

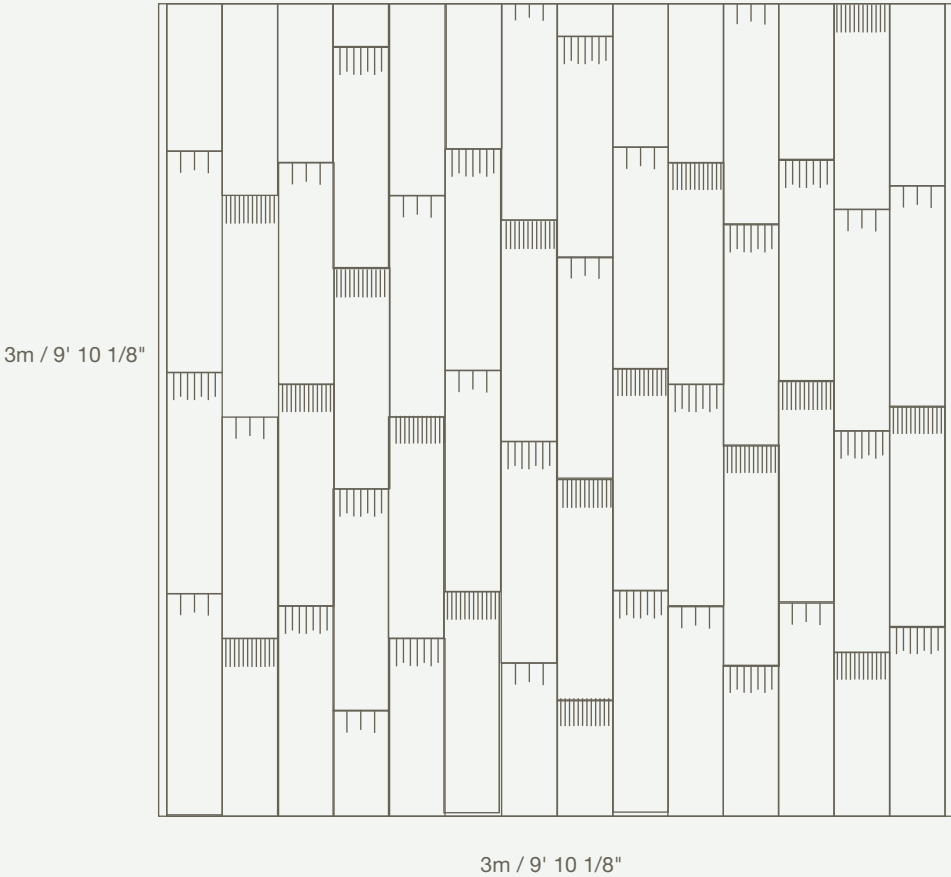

Layout option #2

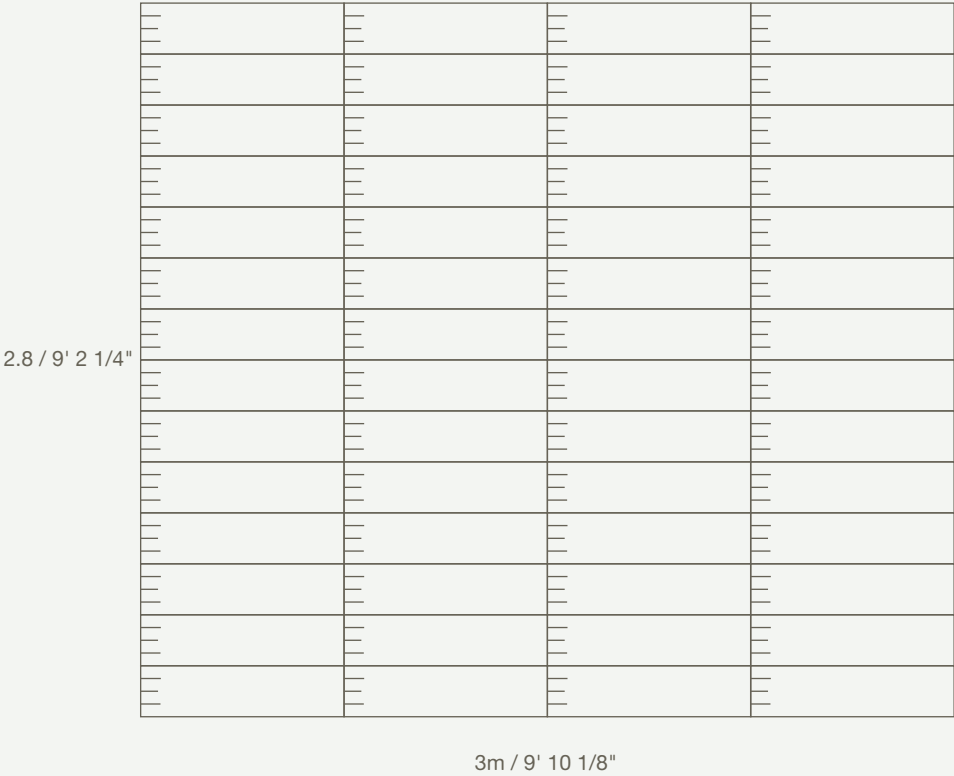

* The recommended schemas matched the tile ratios in each crate, but does not match the amount of tiles per box. (See table below)

Packing / Information

NAME	PCS-SQM	PCS-Crate	SQM-Crate	KG-Crate	SUITABILITY	Catalog num.	Notes
GRID MIX	5.9	96	15.7	708	INTERIOR / EXTERIOR USE FOR WALLS / FLOORING	EN4037	*2CM GRID 4\8\16 MIXED IN EQUAL RATIO
GRID 4	5.9	96	15.7	708	INTERIOR / EXTERIOR USE FOR WALLS / FLOORING	EN4034	
GRID 8	5.9	96	15.7	708	INTERIOR / EXTERIOR USE FOR WALLS / FLOORING	EN4035	
GRID 16	5.9	96	15.7	708	INTERIOR / EXTERIOR USE FOR WALLS / FLOORING	EN4036	
GRID 16 3CM	5.9	68	11.43	743	INTERIOR / EXTERIOR USE FOR WALLS / FLOORING	EN4038	

GENERAL MATERIAL PERFORMANCE DATA

*TESTED ACCORDING TO NP EN1339 STANDARD

DIMENSIONS TOLERANCE	BENDING STRENGTH	ABRASION RESISTANCE	REACTION TO FIRE	SLIP/ SKID	WATER ABSORPTION	FREEZE/THAW RESISTANCE
CLASS 3(R) ±2MM	CLASS 2(T) ≥ 4MPA	CLASS 4(I) ≤ 20MM	A1	SATISFACTORY	CLASS 2(B) ≤ 6% AS A MEAN	CLASS 3(D) ≤ 1.0 KG/M²

COLORS:

001	010	011	012	013	014	019	020	030	031