



INSTALLATION INSTRUCTIONS FOR GROUND CRACK INDUCER

1. Leave 3 to 4mm gap between each 3 metre length to allow for expansion of the plastic.

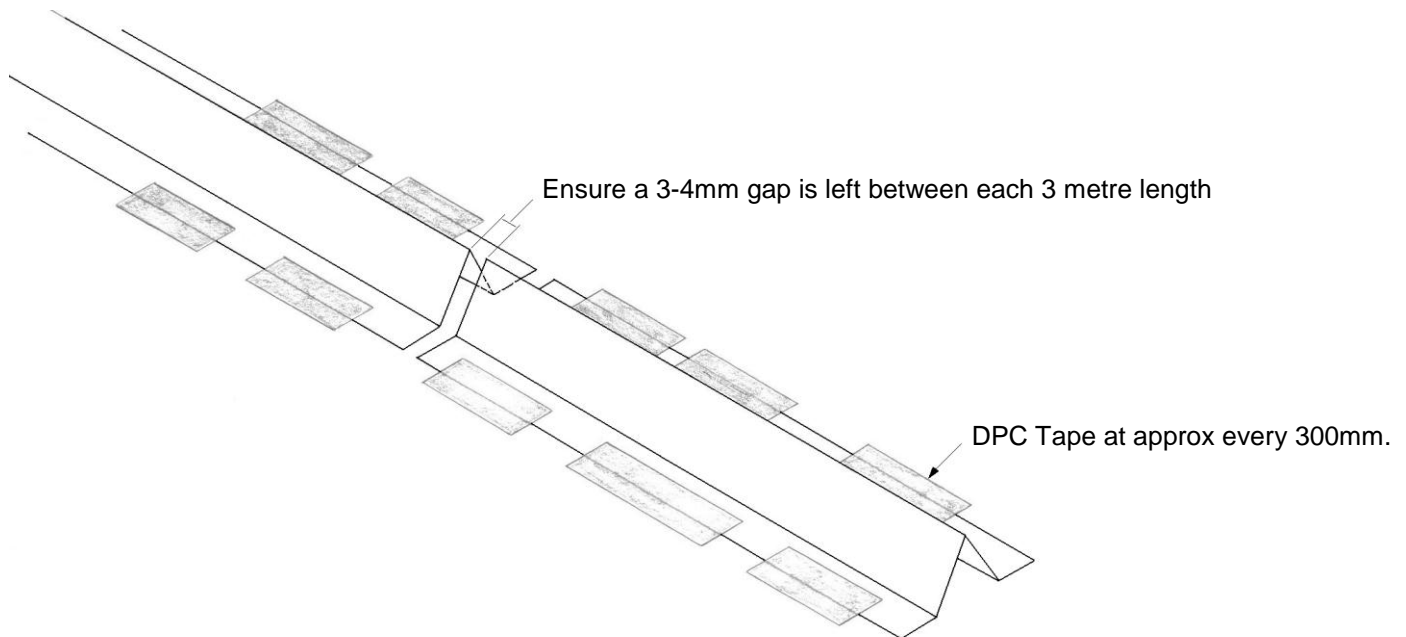

2. MARK PRECISELY ON FORMWORK WHERE CRACK INDUCER IS FOR SAW-CUT.
3. SOFT CUT DIRECTLY ABOVE IMMEDIATELY AFTER FINISHING OPERATION.

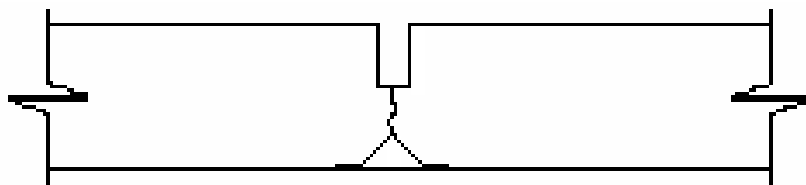

ANY QUESTIONS PLEASE CALL: 0800 422 692

PLEASE STORE
GROUND
CRACK
INDUCER OUT
OF DIRECT
SUN LIGHT