

American Battery Solutions' latest product, **ALLIANCE Intelligent Battery Series™** is designed as scalable building blocks and offer versatility across a variety of uses needing a robust, safe, and high-performance Li-Ion battery.

- Highest quality and reliability
- Ultimate safety and robustness
- Most versatile and easy to use



**148V-3.0**  
48 Volts

**Automotive Quality.**

**Industrial Robustness.**

**HIGHEST QUALITY AND RELIABILITY**

- ✓ Manufactured in world-class battery systems facility *in the USA*
- ✓ Automotive-grade system design and AECQ-qualified components
- ✓ Automotive engineering & validation (vibration, shock, life ...)
- ✓ Highest quality automotive cells from partnership with world-class cell makers

**ULTIMATE SAFETY AND ROBUSTNESS**




- ✓ IP65 water and dust proof, constructed for harsh industrial and motive environments
- ✓ Layers of protection (cells, interconnects, fuses, BMS HW and SW, non-propagation, and integration)
- ✓ ISO-26262 (ASIL-B) Functional Safety
- ✓ Verified software compatibility with leading chargers
- ✓ Integrated cell CID and fusible links

**APPLICATIONS**





**MOST VERSATILE AND EASY TO USE**

- ✓ Scalable modules expand systems up to 30 kWh
- ✓ Small size and feature-rich, suitable for entire portfolio of machines and market applications
- ✓ Easy integration without complex and expensive battery pack development effort
- ✓ OEM and after-market friendly; easy replacement of lead acid

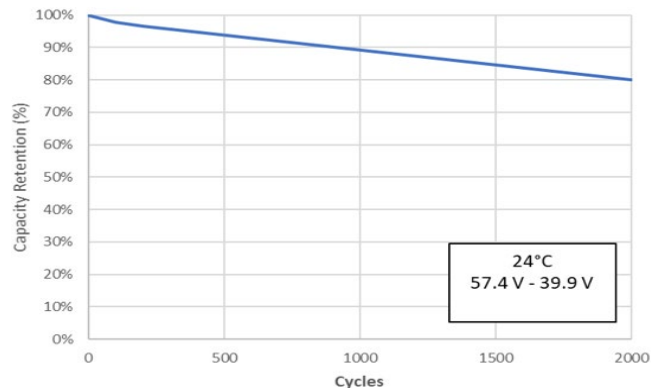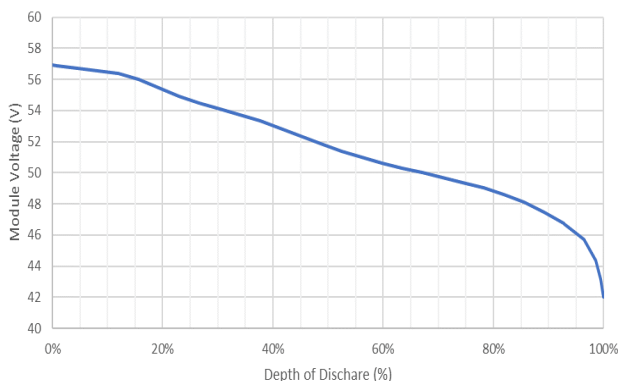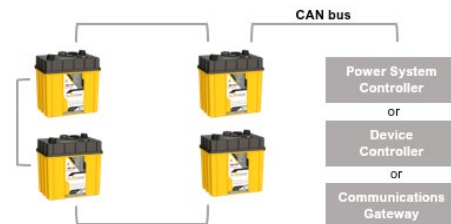

## SERIES / MODEL ALLIANCE I48V-3.0

Battery Type	Lithium Ion
Nominal Voltage	51.1 V
Nominal Capacity <sup>1</sup>	59 Ah
Nominal Energy <sup>2</sup>	3.0 kWh
Cycle Life <sup>6</sup>	4,000 cycles
Mass	15.4 kg

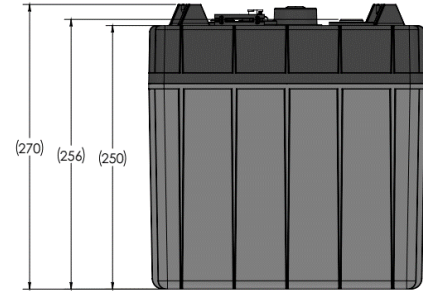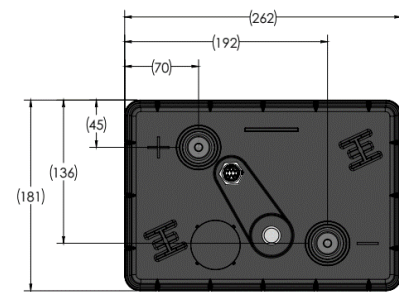

## ELECTRICAL CHARACTERISTICS AT 25°C

Nominal Capacity - 5-Hr rate	59 Ah
Nominal Capacity - 20-Hr rate	60 Ah
Nominal Energy - 5-Hr rate	3.0 kWh
Nominal Energy - 20-Hr rate	3.1 kWh
Max Charging Voltage	57.4 V
Minimum Discharge Voltage	42.0 V
Float Voltage	51.1 V – 57.4 V
Max. Cont. Charging Current <sup>5</sup>	30 A
Max. Charge Current (30 sec.) <sup>5,7</sup>	350 A
Max. Cont. Discharge Current <sup>4</sup>	120 A
Max. Discharge Current (30 sec.) <sup>5,7</sup>	350 A
Max. Inrush Current	445 A (FETs open)
Pre-Charge Circuit	100 ohms (Pre-charge 2 mF in 1 s)

## MECHANICAL CHARACTERISTICS

Case Material	ABS
Case Material Flammability Rating	UL 94 V-0
Environmental Protection	IP 65
Storage Temperature Range <sup>3</sup>	Recommended: -10 °C to 40 °C Max: -20 °C to 60 °C
Operating Temperature Range <sup>3</sup>	Charge: 0 °C to 50 °C Discharge: -20 °C to 60 °C

## SAFETY AND COMPLIANCE

Cell safety certification	UL 1642
Shipping certification	UN 38.3
Safety compliance <sup>8</sup>	UL 2271
Environmental compliance	REACH, RoHS and Battery Directive (2006/66/EC)
EMC/EMI compliance	Meets FCC Title 47 CFR 15 Class B
CE Certification	Complies with EU Directive, IEC 61000-6-1 & IEC 61000-6-3



RECYCLE RESPONSIBLY  
Do not mix with lead acid batteries when recycling

## BMS FEATURES

Communications: CAN 2.0

Functions: Microprocessor, State of Charge and State of Health reporting, Integrated FET disconnect on charge and discharge, current sensor, resettable fuse, cell balancing.

Safety systems: Cell CID, cell fusible link, protections for over-charge, over-discharge, over-current, over-temperature, under-temperature, temperature imbalance, and voltage imbalance.

Parallel configurations: Up to 10 modules in parallel with self-identify master. **Do not connect modules in series.**

## BMS OPERATING LIMITS

Charge limits (per cell)	4.10 V (warning) / 4.15 V (disconnect)
Discharge limits (per cell)	3.00 V (warning) / 2.85 V (disconnect)
Absolute minimum operating Voltage (pack)	39.9 V
Minimum BMS current draw (active)	24 mA
Minimum BMS current draw (sleep)	125 µA

### System Considerations

As outlined in the User's Guide, Alliance batteries will automatically shut down under excessive use conditions in order to prevent damage to the battery and connected equipment. This will generally result in total loss of power to equipment. Systems must be implemented to ensure that sudden loss of power to the system does not result in undesired system behavior.

1. Minimum nominal capacity – 54Ah at beginning of life (BOL)
2. Minimum nominal energy – 2.8kWh at beginning of life (BOL) Usable energy limited by voltage limits to 2.55kWh to optimize cycle life
3. Storage and operation at higher temperatures reduces battery life
4. Duration of maximum constant current is thermally limited by internal components and depends on ambient temperature.
5. Charge and discharge power, current, and energy availability will be limited at the low and high ends of the specified operating temperature range
6. To 70% of initial capacity with usable energy limits
7. Current dependent on SOC and temperature. See user manual for tables.
8. Except for crush.

+1 (248) 462-6364 / [americanbatterysolutions.com](http://americanbatterysolutions.com)