Ballistic Barrier Products

1. Fill out sections 1-11 completely (inches assumed, if metric, indicate as such)
2. Scan and return to sales@ballistic-barrier.com
3. For existing construction, you must include a photo of each door, including 12 inches in each direction around it

For any size, fabric, or construction option not listed here, contact sales@ballistic-barrier.com directly with your request

V022723

Fixed Panel Door Shields

Name _____ **Project** _____ **Quantity** _____ **Date** _____

1 Door Slab Measurements

Standard door size	30x80	36x80	30x84	36x84	36x96	
Custom size	☐	Width ☐	Height ☐			

2 Check Door Mounted Obstacles (see Figure 1)

Door closer	☐	Include picture or make and model of actual obstacle, with dimensions showing its size and position realtive to the top and left edge of the door				
Exit sign	☐					
Kick plate	☐	Width ☐	Height ☐	Top to door bottom ☐		

3 Threat Level (select one)

UL 752 Level 3	☐	Up to .44 Magnum protection
UL 752 Level 2	☐	Up to .357 Magnum and 9mm protection

4 Window in Door (select one)

No window	☐				
Window (see figure 1)		Width ☐	Height ☐	To door top (a) ☐	
Window cover solution (see figure 2)	☐	Nothing, cover window		To door edge (b) ☐	
	☐	Create a matching hole in the Kevlar			
	☐	Flip up cover			
	☐	Sliding cover			

5 Door Knob/Push Bar Style (select all that apply)

Push bar	☐	Make and model needed, if not available, BBP will provide measurement guidance
Door knob (or lever)		Backset ☐ 2⅜ ☐ 2¾ (See figure 1)
		Diameter of knob flange that contacts the door ☐
Dead bolt	☐	Distance from center of deadbolt to center of knob ☐

6 Door Latch (select one)

Left side of door	☐
Right side of door	☐

7 Door Slab Material (select one)

			Yes	No
Solid core wood	☐	Drilling into slab okay?	☐	If no, then please photograph the obstacle and provide the distance to it from the nearest frame edge in notes below
Hollow core wood	☐	Drilling through slab okay?	☐	
Hollow core metal	☐	Slab width	☐	

8 Bottom Style (select one)

Free hanging	☐	Door shield will be free to move as door opens and closes
Screw mounted	☐	Row of screws will mount the bottom of the Kevlar, fixing it in place

9 Cover Fabric Type (select one)

Standard polyester	☐
Custom fabric (describe)	

10 Cover Fabric Color (select one)

Standard colors (circle one)	Midnight	Smoke	Wolf	Winter	Latte	Golden Beige	Sandstone	Cream	Snow
Custom color (describe)									

11 Special Considerations (leave blank if none)

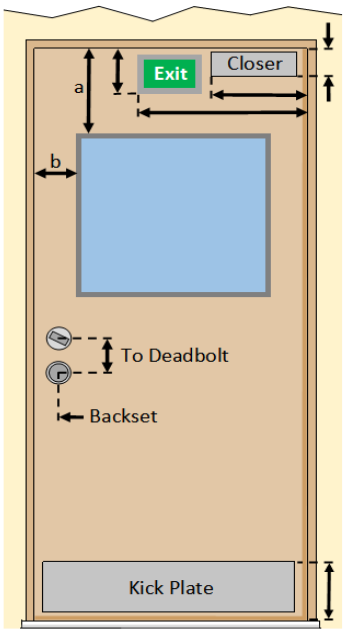

Figure 1

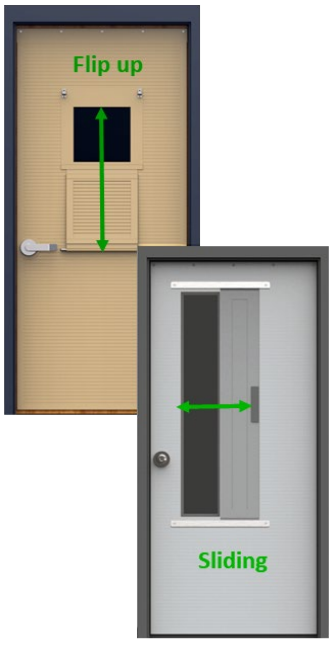

Figure 2