

inspiration 3

revive 1+2 Group 2

kvadrat


brunner ::




Revive 2
423




Revive 1
424




Revive 1
224




Revive 2
133




Revive 2
323



Revive 2
223




Revive 1
914




Revive 2
923




Revive 2
973




Revive 1
974



Revive 2
933




Revive 1
274



Revive 1
434



Revive 2
433



Revive 1
414



Revive 2
383



Revive 1
384




Revive 2
633



Revive 1
664




Revive 2
663

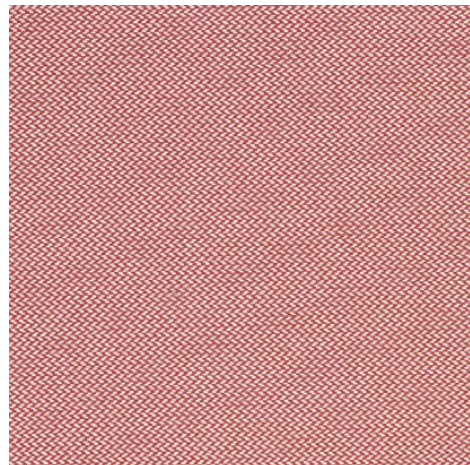


Revive 1
524




Revive 1
634




Revive 2
523




Revive 1
534

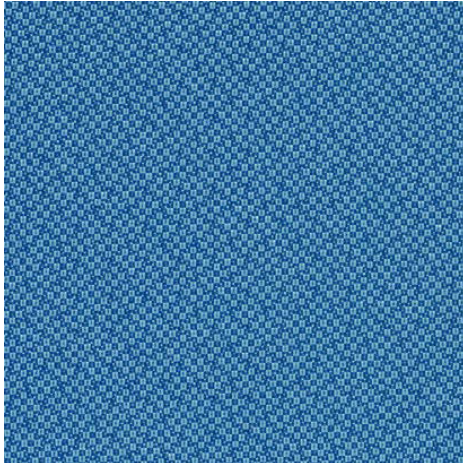


Revive 2
753




Revive 1
754



Revive 1
834




Revive 2
833




Revive 1
944




Revive 2
373




Revive 2
773



Revive 1
774



Revive 1
284




Revive 2
173




Revive 1
184



Revive 2
453




Revive 1
454



Revive 1
764




Revive 2
183




Revive 1
164




Revive 1
194




Revive 2
163




Revive 1
324




Revive 1
154



Revive 2
193



Revive 2
153



Revive 1
144

Revive 1 Designed by Georgina Wright



Application Offices, hotels, institutions, domestic use.
Great durability.

Description 100% recycled polyester FR.
Width 55 inches (140 cm). Weight app. 430 g/lin.m.
Yarndyed. Colour differences may occur.

Selvedge ↔

Tests Abrasion App. 60.000 rubs acc. to the Martindale method EN ISO 12947. Lightfastness: (ISO) 5-7.
Pilling: (EN ISO) 4-5. Fastness to rubbing: (ISO) dry 5, wet 4-5. Flame resistance: EN 1021-1/2.
ignition source 0-1. DIN 4102 B1. ÖNORM B1/Q1.
UNI 9175 1IM. US Cal. Bull. 117-2013. IMO A.652(16).
(Copy of test report available).

Care Please see the ISO symbols. Shrinkage app. 1% when washed at 60°C

Revive 2 Designed by Georgina Wright



Application Offices, hotels, institutions, domestic use.
Great durability.

Description 100% recycled polyester FR.
Width 55 inches (140 cm). Weight app. 420 g/lin.m.
Yarndyed. Colour differences may occur.

Selvedge ↔

Tests Abrasion App. 60.000 rubs acc. to the Martindale method EN ISO 12947. Lightfastness: (ISO) 5-7.
Pilling: (EN ISO) 4-5. Fastness to rubbing: (ISO) dry 5, wet 4-5. Flame resistance: EN 1021-1/2. ignition source 0-1.
DIN 4102 B1. ÖNORM B1/Q1. UNI 9175 1IM.
US Cal. Bull. 117-2013. IMO A.652(16)
(Copy of test report available).

Care Please see the ISO symbols. Shrinkage app. 1% when washed at 60°C