



brunner ::

san Group 4


kvadrat




190




730




350




180




130




390




150



990




570




630




950



580




540




170

San

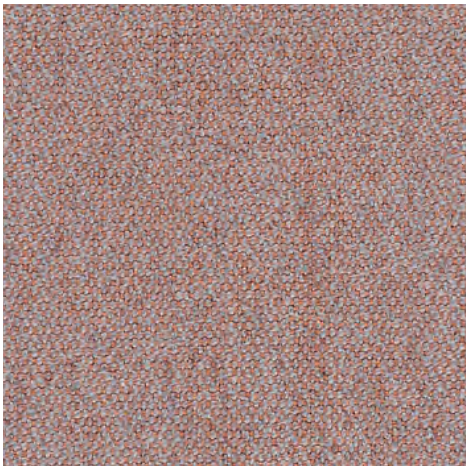


370




430



410




360



530



710




750




220




910




780



230



770



790

San

Designed by Louise Sigvardt

UK/US

Application Offices, hotels, institutions, domestic use. Great durability.

Description 92% new wool, worsted, 8% nylon. Width app. 55 inches (140 cm). Weight app. 370 g/lin.m, 11.9 oz/ly. Yarn dyed. Foreign fibres may occur in light colours. Colour differences may occur.

Selvedge/Direction ⚡

Abrasion: App. 60,000 rubs acc. to the Martindale method EN ISO 12947*.

Lightfastness (ISO) 5-7. **Pilling** (EN ISO) 3-4.

Fastness to rubbing (ISO) dry 4-5, wet 3-5.

Sound absorption (EN ISO 354) 0.50/Class D (flat), 0.75/Class C (waved). **Airflow** 314 Pa s/m.

Flame resistance: AS/NZS 3837 Class 2. BS 5852 Crib 5 with treatment. BS 5852 part 1. EN 1021-1/2. IMO FTP Code 2010:Part 8. NF D 60 013. SN 198 898 5.3 with treatment. UNI 9175 1IM. US Cal. Bull. 117-2013. (Copy of test report available).

Care Please see the ISO symbols.

Disinfection, see kvadrat.dk.



10 year warranty

Quality and environmental system accreditation according to ISO 9001 and ISO 14001.

* ACT® Registered Certification Marks

* Abrasion test results exceeding ACT performance guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention.

EU Ecolabel: Encouraging the use of sustainable fibres. Durable and high quality. Hazardous substances restricted.

Contact and further information kvadrat.dk



US contact info: 1-800-620-9309