

HYUNDAI WIA

Next-generation High-speed Compact Tapping Center

**i-CUT** 4000/4500



### i-CUT4000

### i-CUT4500


|                             |        |                                                                                                                         |                                                                                 |
|-----------------------------|--------|-------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------|
| Table Size (L×W)            | mm(in) | 650×400 (25.6"×15.7")                                                                                                   | 800×450 (31.5"×17.7")                                                           |
| Max. Load Capacity          | kg(lb) | 300 (661)                                                                                                               |                                                                                 |
| Spindle Taper               | -      | BBT30                                                                                                                   |                                                                                 |
| Spindle Speed               | r/min  | 12,000 [15,000] [24,000] [12,000] [15,000] [24,000]                                                                     |                                                                                 |
| Spindle Power (Max./Cont.)  | kW     | 13/3.7 (17.4/5) [18/5.5 (24.1/7.4)] [3.7/1.1 (5/1.5)] [14.1/4.1 (18.9/5.5)] [14.1/4.1 (18.9/5.5)] [22.6/3.5 (30.3/4.7)] |                                                                                 |
| Number of Tools             | EA     | 21 [Twin Arm : 20, 24]                                                                                                  |                                                                                 |
| Travel (X/Y/Z)              | mm     | 550/400/300 (21.7"/15.7"/11.8")<br>[Twin Arm : 550/400/480 (21.7"/15.7"/18.9")]                                         | 700/450/300 (29.5"/17.7"/11.8")<br>[Twin Arm : 700/450/480 (29.5"/17.7"/18.9")] |
| Rapid Traverse Rate (X/Y/Z) | m/min  | 56/56/56 (2,205/2,205/2,205)                                                                                            |                                                                                 |

[ ] : Option ■ : iTROL

# i-CUT 4000/4500

Tapping Center with More Upgraded Quality & Performance

**5**  
HIGHLIGHT

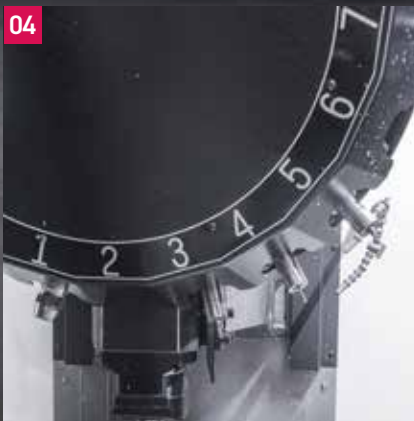

③ High-performance Spindle

① Optimal Structure for Jig

④ Servo Motor ATC

② High-speed Feed Capability

⑤ Optimal Chip Disposal

## Highlight

# 01 \_ Optimal Structure for Jig



## Optimal Structure for Automated Jig

Maximum height from top surface of the table to the main spindle nose has been increased from 480mm to 500mm, and you can secure sufficient machining area even when you apply the tools.


(Automated response of gantry loader available when using twin-arm ATC)

### Turret Type (A~B)

200~500 mm (7.9"~19.7")

### Twin Arm Type (A~B)

200~680 mm (7.9"~26.8")

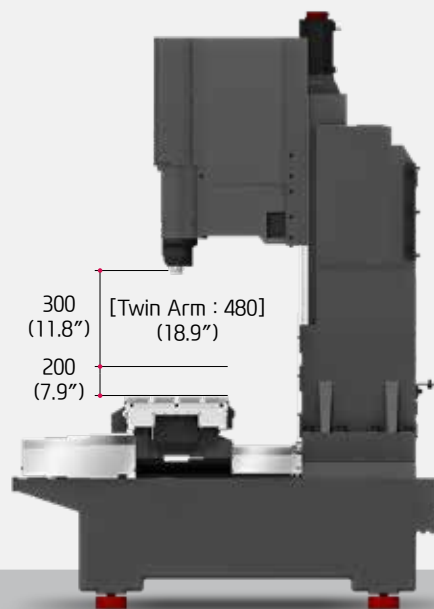

### High Column **OPTION**

As an option, high columns with 150mm and 300mm is provided.





Highlight

## 02 \_ High-speed Feed Capability



### Rapid Traverse Rate (X/Y/Z)

**56/56/56** m/min (2,205/2,205/2,205 ipm)

### Travel (X/Y/Z)

[ ] : Option

i-CUT4000

**550/400/300** mm (21.7"/15.7"/11.8")

[Twin Arm : 550/400/480 (21.7"/15.7"/18.9")]

i-CUT4500

**700/450/300** mm (27.6"/17.7"/13")

[Twin Arm : 700/450/480 (27.6"/17.7"/18.9")]

### Ball Screw

Lubricating ball screw support bearings with oil helps improve the durability of the bearing.

### High-performance Double-seal Type LM Guide

Application of high-performance LM guide featuring double-seal attachment structure has significantly improved the durability of LM guide.

Highlight

## 03 \_ High-performance Spindle



### Direct Spindle

It has excellent power transmission capability from applying a direct-drive spindle which directly connects the motor and spindle, and it achieves a maximum rotation speed of 24,000r/min to allow for a wide range of machining.

### Spindle Air Purge Application


The main shaft motor cover prevents coolant from flowing into the head. In addition, by designing the spindle air purge through the spindle, the ability to remove chips from the spindle is improved.

### Spindle Thru Coolant **OPTION**

As an option, 20/30/70 bar through spindle coolant is available.

### Dual Contact Spindle

The Big Plus spindle system provides dual contact between the spindle face and the flange face of the tool holder.



i-CUT4000/4500

Max. 24,000 rpm





Highlight

# 04 \_ Servo Motor ATC



## Servo ATC

Servo motor is applied on the ATC to reduce tool change time. Also, accurate tool positioning control increases cutting stability.  
(Turret Type : Servo Motor / Twin Arm Type : Inverter Motor)

## Best-in-class Tool Change Times

|                |     |                           |
|----------------|-----|---------------------------|
| Previous Model | C-C | 2.1 sec                   |
| i-CUT4000      | C-C | 1.8 sec 0.3 sec reduction |

## Turret Type Magazine


Unlike the previous models that featured a 14-tool magazine, the i-CUT4000/4500 adopted a 21-tool magazine as standard to expand the tooling range.

## Twin Arm Type OPTION

For i-CUT4000/4500, twin-arm type ATC comes as option for gantry automation. (Turret type ATC : Gantry automation cannot be implemented due to interference with the magazine.)

## Highlight

## 05 \_ Optimal Chip Disposal

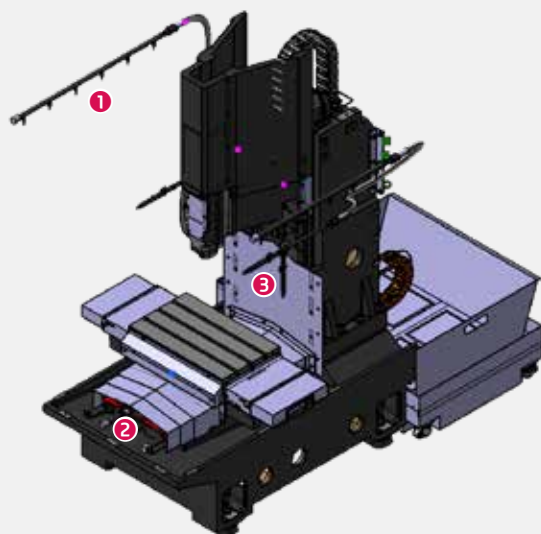

| ITEM                   | i-CUT4000/4500                                                                              | Previous Model                                                                            |
|------------------------|---------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|
| ① Shower Coolant       | Standard                                                                                    | Option                                                                                    |
| ② Bed Flushing Coolant | Standard : 2EA                                                                              | Non Applicable                                                                            |
| ③ Flood Coolant        | 3 Locations on both sides of the equipment<br>(Concentrated spraying on workpiece possible) | 4 Locations at the bottom of the spindle<br>(Concentrated spraying on workpiece possible) |

### Improvement of Chip Disposal Capability

The chip disposal capability has been significantly improved compared to the previous equipment with standard application of two shower coolants, bed coolants, improvement of chip disposal tilt angle of the bed, and improvement of flood coolant position.

### Chip Conveyor


|               |                                                                                    |
|---------------|------------------------------------------------------------------------------------|
| Hinge         | Chip Type : Roughing Chip, Long Chip, Chip complex                                 |
|               | Highly efficient when disposing a lot of chips. Capable of handling stringy chips. |
| Scraper       | Chip Type : Finely broken chip blown out                                           |
|               | Convenient for shortly cut chips.                                                  |
| ❖ Drum Filter | Chip Type : Powder, Micro Chip                                                     |
|               | Advantageous in precision, as the chips do not flow in to the coolant nozzle.      |



## Cutting Possibility


## Cutting Possibility

### FACE MILL (Material : S45C (Carbon steel))




|                 |              |
|-----------------|--------------|
| Tool dia.       | Ø63×5F       |
| Spindle speed   | 3,000 r/min  |
| Rapid feed rate | 5,700 mm/min |
| Cutting width   | 50 mm        |
| Cutting depth   | 4 mm         |
| Chip quantity   | 1,140 cc/min |

### DRILL (Material : S45C (Carbon steel))



|                 |           |
|-----------------|-----------|
| Tool dia.       | Ø43       |
| Spindle speed   | 199 r/min |
| Rapid feed rate | 39 mm/min |
| Cutting width   | 43 mm     |
| Cutting depth   | 60 mm     |
| Chip quantity   | 57 cc/min |

### TAP (Material : S45C (Carbon steel))



|                 |            |
|-----------------|------------|
| Tool dia.       | M27×P3.0   |
| Spindle speed   | 320 r/min  |
| Rapid feed rate | 960 mm/min |
| Cutting width   | 36 mm      |
| Chip quantity   | 54 mm      |

❖ The above results might be different based on your processing circumstances.

Optimal Structure for Electric Car Battery Case machining



1,140 cc/min

## Convenience

### Precision & Ecosystem




#### Touch Sensor

Workpiece coordinate values can be set automatically using the optional spindle probe.



#### TLM

Tool lengths and diameters can be set automatically using the optional tool setter. This can also be used to monitor attrition and detect broken tools.

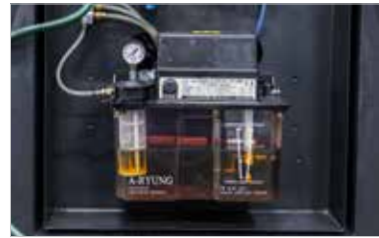

#### Lubrication System

By applying lubricant only when the machine's axis are moving, lubrication consumption is reduced by compared to standard systems.



#### Mist Collector

Mist Collector reduces the amount of smoke and oil mist in the air. This helps build a safe and comfortable working environment and improve durability.



#### Oil Skimmer

An oil skimmer can increase coolant and tool life by removing tramp oil contaminants.




#### MQL (Minimal Quantity Lubrication)

The goal of this system is to spray only the amount of lubricant required to prevent heat and chip build up at the cutting tool or work piece face.

### NC Rotary Table & Hydraulic Supply

Various shapes of products can be processed when using NC Rotary Table. In addition, 100 bar of high pressure hydraulic unit for the fixture increases the tightening power of the teeth.



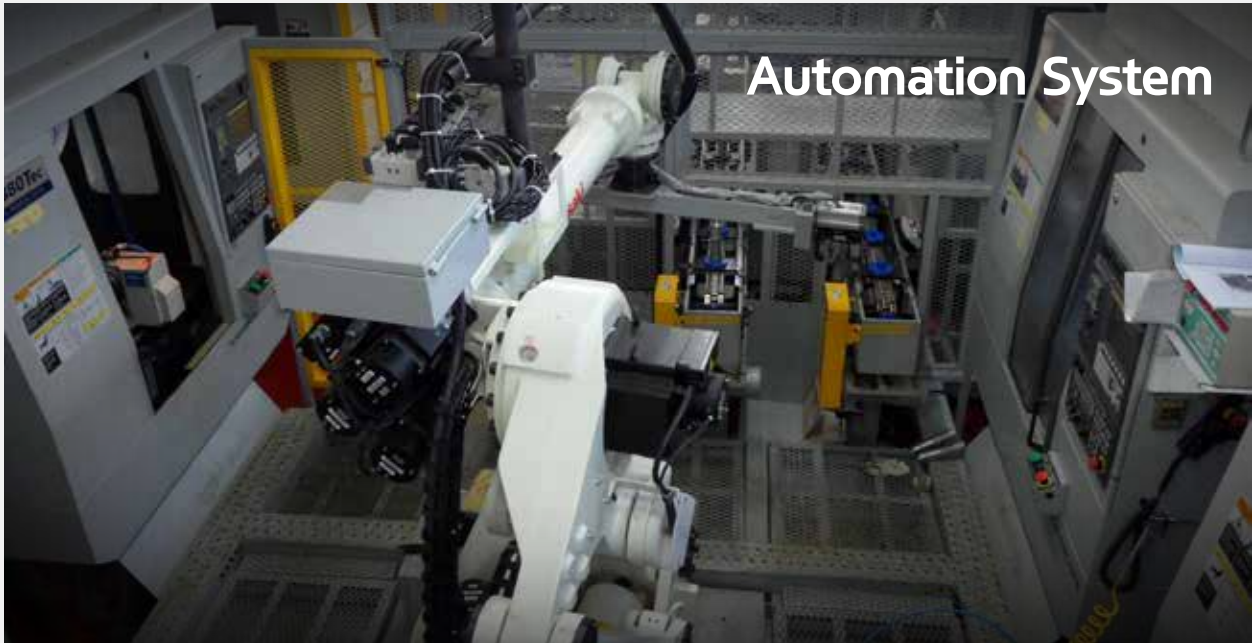

## Gantry Loader System

Gantry loader transfers raw material from in-stocker to machine automatically, starting machining process. Gantry automation provides good equipment access during operation and easy work monitoring, program modification and maintenance. In addition, small installation area facilitates optimized factory layout.



## Robot System

With its know-how and experience, Hyundai WIA is globally recognized in the field of automation. Robot automation features flexible responsiveness, convenience and maintenance regardless of type for automation construction.



# HYUNDAI WIA FANUC – SMART PLUS



## FANUC Oi Plus Series

- Customization functions are already included and offer an easy way to create HMI screens that are tailored to the application.
- The advantage being that existing programs can be used immediately and that new programs can be developed without the need for costly redundancies.
- Providing the high-performance offered by FANUC servo technology, this CNC also offers the same user-friendly convenience over the complete range.

### 10.4" Monitor as a Standard


|                                    |                                                        |
|------------------------------------|--------------------------------------------------------|
| Smart Machine Control              | Fast Cycle Time Technology                             |
|                                    | Fine Surface Technology                                |
| AI Contour Control                 | AICC-2 (200 blocks)                                    |
| Smooth Tolerance Control           | 0.1µm command and specify tolerance                    |
| JERK Control                       | Diminished vibration by controlling acceleration speed |
| Machining Condition Selection      | Designated machining level based on speed & quality    |
| Machining Quality Control Function | Smooth Tolerance+ integrated support                   |
| Part Program Storage               | 5120M (2MB)                                            |
| No. of Registerable Programs       | 1000 EA                                                |



## Dialogue Program (Smart Guide-i) **OPTION**

This software offers maximum user convenience through a dialogue program from setup to machining. This includes writing machining programs and simulation checks.

# High-quality Machining & Machining Support S/W



## Tool Monitoring (HW-TM) **OPTION**

This tool status monitoring software monitors and protects workpiece, tools, and equipment through real-time monitoring of the motor load from machining.



## Adaptive Feed Control (HW-AFC)

This software improves the lifetime and productivity of tools by automatically controlling the feed to maintain an even machining load.



## Thermal Displacement Compensation (HW-TDC) **OPTION**

This software improves machining precision by minimizing thermal deformation from changes in external environments and machining.



## Machining Condition Selection (HW-MCS)

This software automatically optimizes rapid transfer parameters for cutting transfers and workpiece weights depending on the machining type (based on rate/precision /quality)



## Machine Guidance (HW-MCG)

This software offers various user convenience functions such as tool manipulation, maintenance, tool monitoring, and a pop-up/status window



## Tool/Workpiece Measurement (Renishaw GUI) **OPTION**

This user convenience GUI software measures material coordinate systems, tool lengths/diameters/damage to tools (included in Renishaw H/W set)

# Specifications

## Standard & Optional

| Spindle                                                 |                     | i-CUT4000 | i-CUT4500 |
|---------------------------------------------------------|---------------------|-----------|-----------|
| 12,000rpm (13kW)                                        | FANUC               | ●         | ●         |
| 15,000rpm (15kW)                                        | FANUC               | ○         | ○         |
| 24,000rpm (3.7kW)                                       | FANUC               | ○         | ○         |
| 12,000rpm (14.1kW)                                      | iTROL               | ○         | ○         |
| 15,000rpm (14.1kW)                                      | iTROL               | ○         | ○         |
| 24,000rpm (22.6kW)                                      | iTROL               | ○         | ○         |
| Spindle Cooling System (Fan Cooler)                     |                     | –         | –         |
| ATC                                                     |                     |           |           |
| ATC Extension                                           | 21 (Turret)         | ●         | ●         |
|                                                         | 20 (Twin Arm)       | ○         | ○         |
|                                                         | 24 (Twin Arm)       | ○         | ○         |
| Tool Shank Type                                         | BBT30               | ●         | ●         |
|                                                         | BCV30               | –         | –         |
| Pull Stud                                               | 45°                 | ●         | ●         |
| Table & Column                                          |                     |           |           |
| T-Slote Pallet                                          |                     | ●         | ●         |
| NC Rotary Table                                         |                     | ☆         | ☆         |
| High Column                                             | 150mm (5.9")        | ○         | ○         |
|                                                         | 300mm (11.8")       | ○         | ○         |
| Coolant System                                          |                     |           |           |
| Std. Coolant (Nozzle)                                   |                     | ●         | ●         |
| Bed Flushing Coolant                                    |                     | ●         | ●         |
| Through Spindle Coolant*                                | 20bar               | ○         | ○         |
|                                                         | 30bar               | ○         | ○         |
|                                                         | 70bar               | ○         | ○         |
| Top Cover                                               |                     | ●         | ●         |
| Shower Coolant                                          |                     | ●         | ●         |
| Gun Coolant                                             |                     | ○         | ○         |
| Air Gun                                                 |                     | ○         | ○         |
| Cutting Air Blow                                        |                     | ○         | ○         |
| Tool Measuring Air Blow (Only for TLM)                  |                     | ○         | ○         |
| Air Blow for Automation                                 |                     | ☆         | ☆         |
| Thru MQL Device (Without MQL)                           |                     | ☆         | ☆         |
| Coolant Chiller (Sub Tank)                              |                     | ☆         | ☆         |
| Power Coolant System (For Automation)                   |                     | ☆         | ☆         |
| Chip Disposal                                           |                     |           |           |
| Coolant Tank                                            | 220 ℓ               | ●         | ●         |
|                                                         |                     |           |           |
| Chip Conveyor (Hinge/Scraper)                           | Rear (Left)         | ○         | ○         |
|                                                         | Rear (Right)        | ○         | ○         |
|                                                         | Rear (Rear)         | ○         | ○         |
| Special Chip Conveyor (Drum Filter)                     |                     | ☆         | ☆         |
| Chip Wagon                                              | Standard (180 ℓ)    | ○         | ○         |
|                                                         | Swing (200 ℓ)       | ○         | ○         |
|                                                         | Large Swing (290 ℓ) | ○         | ○         |
|                                                         | Large Size (330 ℓ)  | ○         | ○         |
|                                                         | Customized          | ☆         | ☆         |
| S/W                                                     |                     |           |           |
| DNC software (HW-eDNC)                                  |                     | ○         | ○         |
| Machine Monitoring System (HW-MMS Cloud/Edge/Remote)    |                     | ○         | ○         |
| Machine Monitoring System & Analysis (HW-MMS Edge Plus) |                     | ☆         | ☆         |
| Automation CAM program (HW-ACAM)                        |                     | ○         | ○         |
| Conversational program (HW-DPRO)                        |                     | ○         | ○         |
| SmartGuide-i : FANUC                                    |                     | ○         | ○         |
| Tool Monitoring (HW-TM) : FANUC                         |                     | ○         | ○         |
| Adaptive Feed Control (HW-AFC) : FANUC                  |                     | ●         | ●         |
| Thermal Displacement Compensation (HW-TDC)              |                     | ○         | ○         |
| Machining Condition Selection (HW-MCS) : FANUC          |                     | ●         | ●         |
| Machine Guidance (HW-MCG) : FANUC                       |                     | ●         | ●         |
| RENISHAW GUI : FANUC                                    |                     | ○         | ○         |
| Spindle Warm up Function (HW-WARMUP) : FANUC            |                     | ●         | ●         |
| Energy Saving System (HW-ESS) : FANUC                   |                     | ●         | ●         |







● : Standard ○ : Option ☆ : Prior Consultation – : Non Applicable

| Electric Device                                             |                     | i-CUT4000 | i-CUT4500 |
|-------------------------------------------------------------|---------------------|-----------|-----------|
| Call Light                                                  | 2 Color : ■ ■       | ●         | ●         |
| Call Light & Buzzer                                         | 3 Color : ■ ■ ■ B   | ○         | ○         |
| Work Light                                                  |                     | ●         | ●         |
| Electric Cabinet Light                                      |                     | ○         | ○         |
| Remote MPG                                                  |                     | –         | –         |
| Work Counter                                                | Digital             | ○         | ○         |
| Total Counter                                               | Digital             | ○         | ○         |
| Tool Counter                                                | Digital             | ○         | ○         |
| Multi Tool Counter                                          | 6 EA                | ○         | ○         |
|                                                             | 9 EA                | ○         | ○         |
| Electric Circuit Breaker                                    |                     | ○         | ○         |
| AVR (Auto Voltage Regulator)                                |                     | ☆         | ☆         |
| Transformer (380V : 20kVA)                                  | FANUC               | ○         | ○         |
| Transformer (220V : 25kVA)                                  | iTROL               | ○         | ○         |
| Auto Power Off                                              |                     | ○         | ○         |
| Measuring Device                                            |                     |           |           |
| Air Zero                                                    | TACO                | ☆         | ☆         |
|                                                             | SMC                 | ☆         | ☆         |
| Work Measuring Device                                       |                     | ☆         | ☆         |
| TLM (Marposs/Renishaw/Blum)                                 | Touch               | ○         | ○         |
|                                                             | Laser               | ○         | ○         |
| Tool Broken Detective Device                                |                     | ☆         | ☆         |
| Coolant Level Sensor (Only for Chip Conveyor, Bladder Type) |                     | ☆         | ☆         |
| Environment                                                 |                     |           |           |
| Air Conditioner                                             |                     | ○         | ○         |
| Dehumidifier                                                |                     | ○         | ○         |
| Oil Mist Collector                                          |                     | ☆         | ☆         |
| Oil Skimmer (Only for Chip Conveyor)                        |                     | ○         | ○         |
| MQL (Minimal Quantity Lubrication)                          |                     | ☆         | ☆         |
| Fixture & Automation                                        |                     |           |           |
| Auto Door                                                   |                     | ○         | ○         |
| Sub O/P                                                     |                     | ☆         | ☆         |
| NC Rotary Table/F                                           | Single              | ○         | ○         |
|                                                             | Channel             | ☆         | ☆         |
| Control of Additional Axis                                  |                     | ○         | ○         |
| External M Code 4ea                                         |                     | ○         | ○         |
| Automation Interface                                        |                     | ☆         | ☆         |
| I/O Extension (In & Out)                                    | 16 Contact          | ○         | ○         |
|                                                             | 32 Contact          | ○         | ○         |
| Hyd. Device                                                 |                     |           |           |
| Hyd. Unit for Fixture                                       | 45bar               | ☆         | ☆         |
|                                                             | 70bar               | ☆         | ☆         |
|                                                             | 100bar              | ☆         | ☆         |
|                                                             | Customized          | ☆         | ☆         |
| ETC                                                         |                     |           |           |
| Tool Box                                                    |                     | ●         | ●         |
| Customized Color                                            | Need for Munsel No. | ☆         | ☆         |
| CAD&CAM Software                                            |                     | ☆         | ☆         |

\*Through Spindle Coolant : Please check the filter types with sales representative.  
Specifications are subject to change without notice for improvement.

# Specifications

## Spindle Output/Torque Diagram

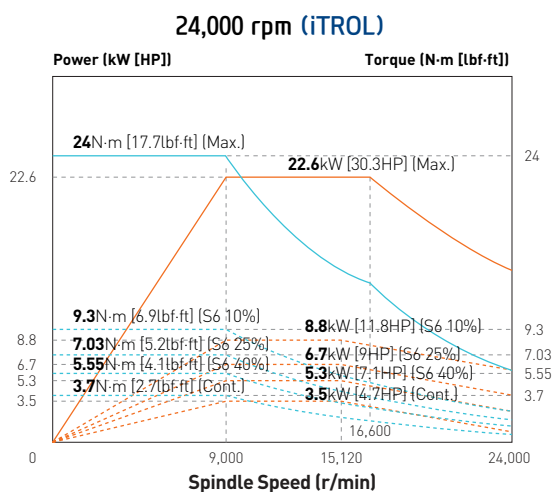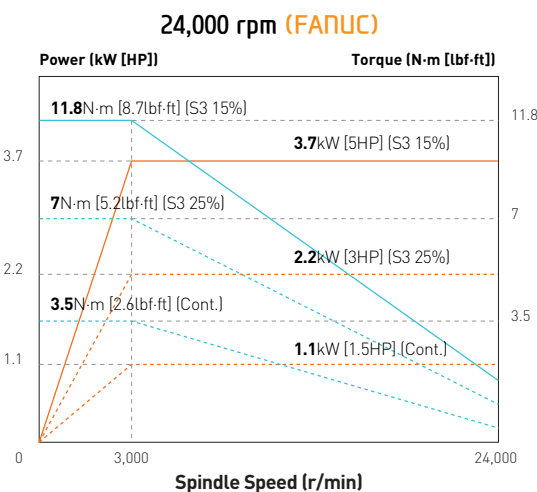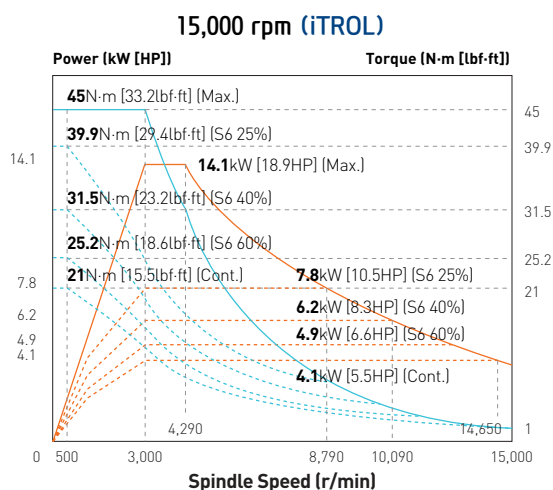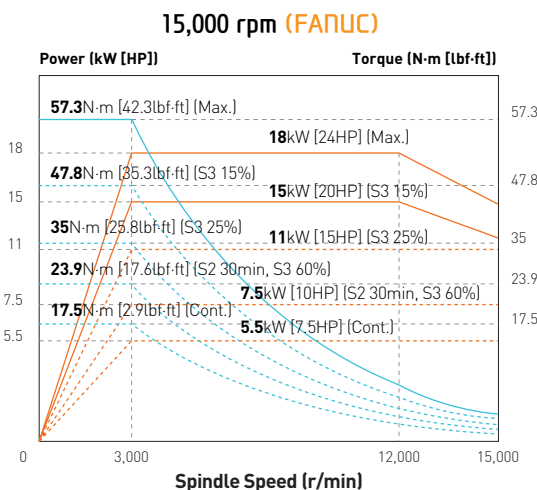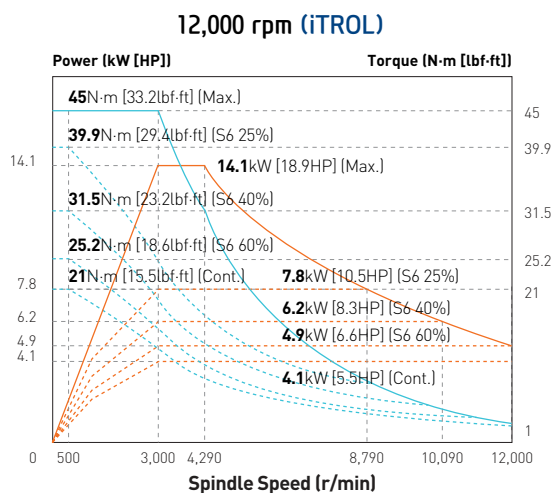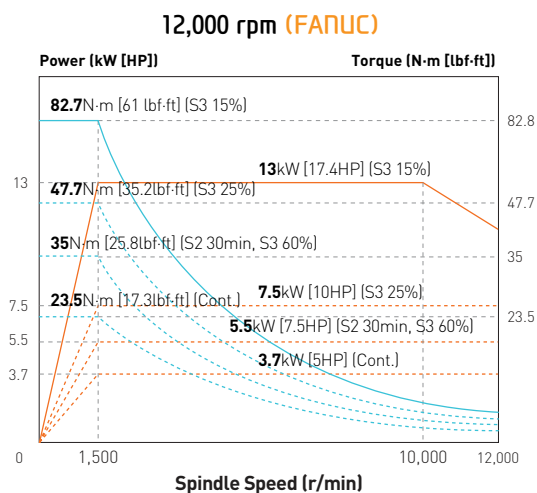


# Specifications

## External Dimensions

unit : mm(in)

i-CUT4000

i-CUT4500

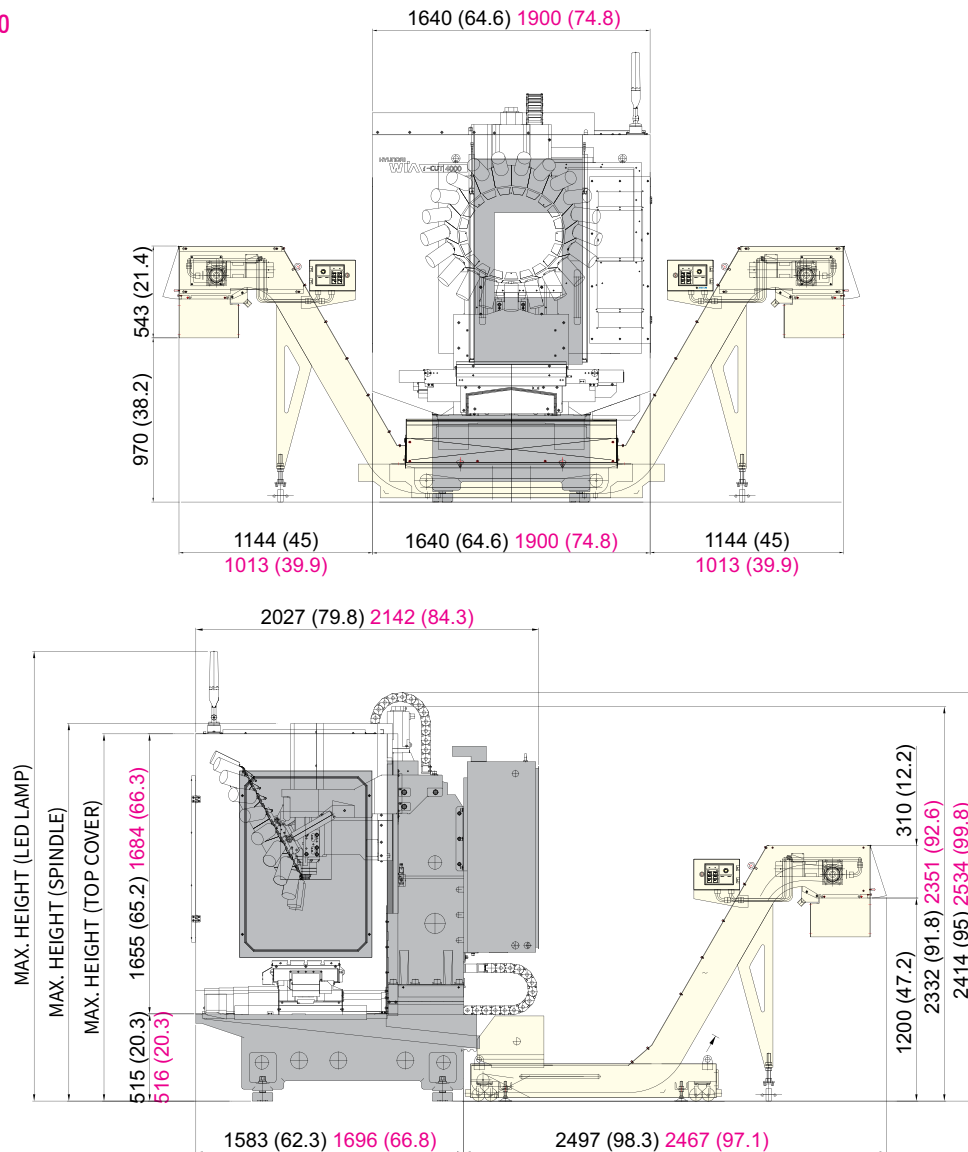



| Model     | Height Item       | Max. Height (LED Lamp) |          | Max. Height (Top Cover) |               | Spindle Motor Height |               |
|-----------|-------------------|------------------------|----------|-------------------------|---------------|----------------------|---------------|
|           |                   | Turret                 | Twin Arm | Turret                  | Twin Arm      | Turret               | Twin Arm      |
| i-CUT4000 | Std. Column       | 2,655 (104.5)          |          | 2,170 (104.5)           | 2,602 (102.4) | 2,400 (94.5)         | 2,580 (101.6) |
|           | High Column 150mm |                        |          | 2,362 (93)              | 2,810 (110.6) | 2,550 (100.4)        | 2,730 (107.5) |
|           | High Column 300mm |                        |          | 2,472 (97.3)            | 2,920 (115)   | 2,700 (106.3)        | 2,880 (113.4) |
| i-CUT4000 | Std. Column       | 2,685 (105.7)          |          | 2,200 (86.6)            | 2,632 (103.6) | 2,430 (95.7)         | 2,610 (102.8) |
|           | High Column 150mm |                        |          | 2,392 (94.2)            | 2,840 (111.8) | 2,580 (101.6)        | 2,760 (108.7) |
|           | High Column 300mm |                        |          | 2,502 (98.5)            | 2,950 (116.1) | 2,730 (107.5)        | 2,910 (114.6) |

# Specifications

Table Dimensions

unit : mm(in)

BBT 30

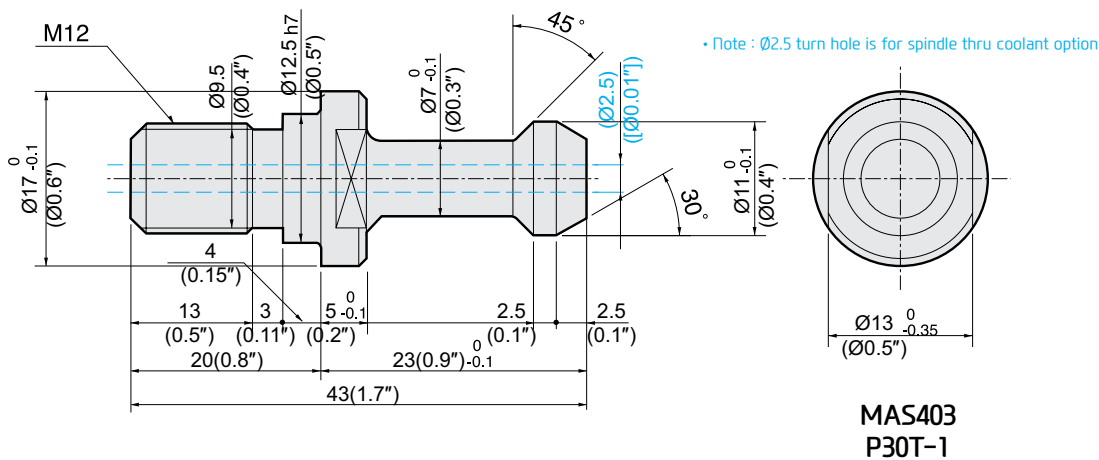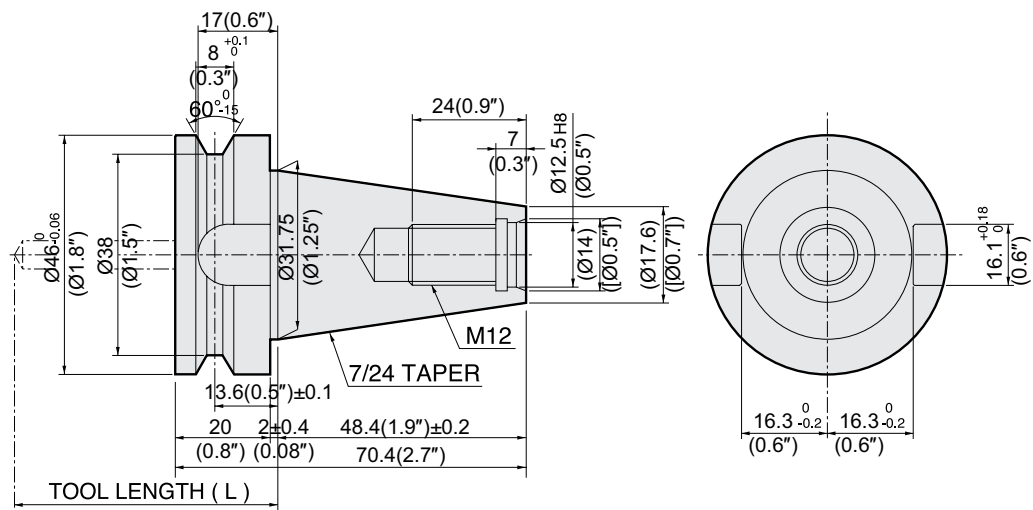


# Specifications


## Table Dimensions

unit : mm(in)

### i-CUT4000

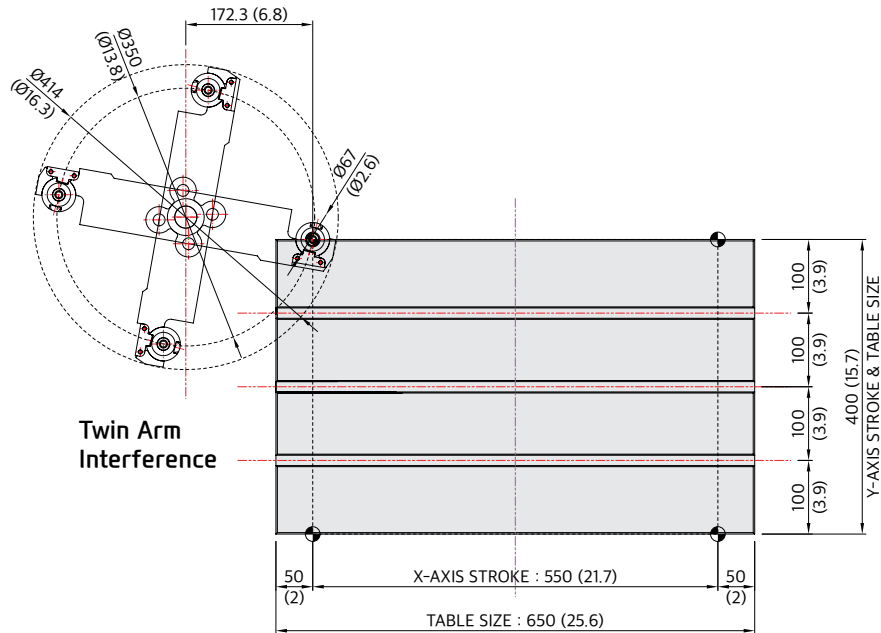

### i-CUT4500

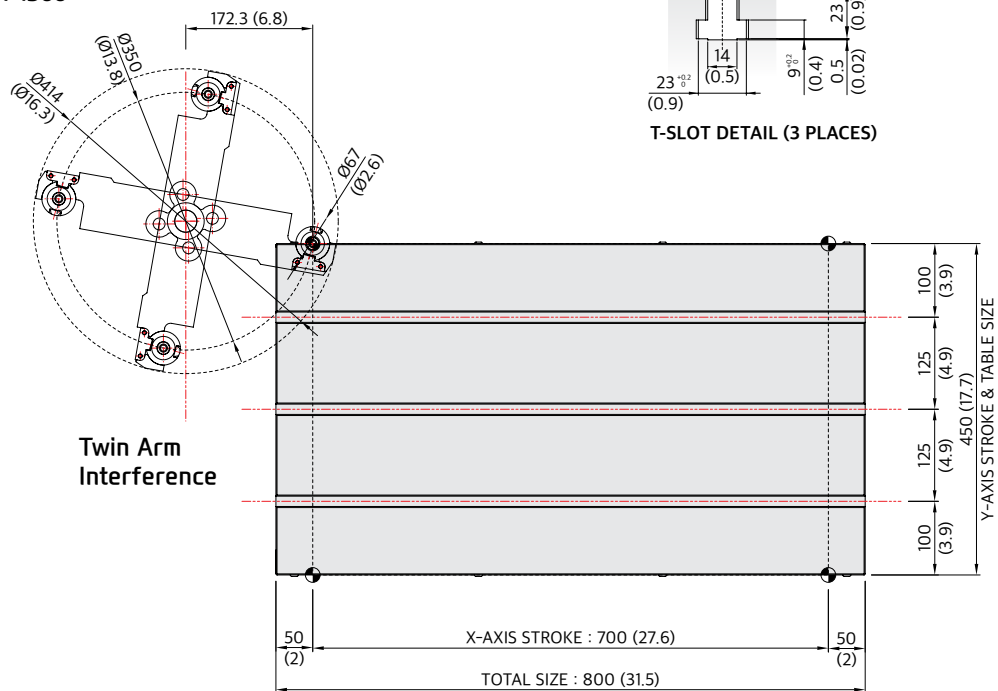

# Specifications

## Specifications

[ ] : Option ■ : iTROL

| ITEM          |                                     |                    | i-CUT4000                                                                                                                      | i-CUT4500                                                                          |
|---------------|-------------------------------------|--------------------|--------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
| TABLE         | Table Size (L×W)                    | mm(in)             | 650×400 (25.6"×15.7")                                                                                                          | 800×450 (31.5"×17.7")                                                              |
|               | Maximum Load Capacity               | kg(lb)             | 300 (661.4)                                                                                                                    |                                                                                    |
| SPINDLE       | Spindle Taper                       | -                  | BBT30                                                                                                                          |                                                                                    |
|               | Spindle Speed (rpm)                 | r/min              | 12,000 [15,000] [24,000] [12,000] [15,000] [24,000]                                                                            |                                                                                    |
|               | Power (Max./Cont.)                  | kW(HP)             | 13/3.7 [18/5.5] [3.7/1.1] [14.1/4.1] [14.1/4.1] [22.6/3.5]<br>(17.4/5 [24/7.5] [5/1.5] [18.9/5.5] [18.9/5.5] [30.3/4.7])       |                                                                                    |
|               | Torque (Max./Cont.)                 | N·m(lbf·ft)        | 82.7/23.5 [57.3/17.5] [11.8/3.5] [45/21] [45/21] [24/3.7]<br>(61/17.3 [42.3/2.9] [8.7/2.6] [33.2/15.5] [33.2/15.5] [17.7/2.7]) |                                                                                    |
|               | Spindle Driving Method              | -                  | Direct                                                                                                                         |                                                                                    |
| FEED          | Travel (X/Y/Z)                      | mm(in)             | 550/400/300 (21.7"/15.7"/11.8")<br>[Twin Arm : 550/400/480<br>(21.7"/15.7"/18.9")]                                             | 700/450/300 (27.6"/17.7"/11.8")<br>[Twin Arm : 700/450/480<br>(27.6"/17.7"/18.9")] |
|               | Distance from Table Top to SP. Nose | mm(in)             | 200 ~ 500 (7.9"~19.7") [Twin Arm : 680 (26.8")]                                                                                |                                                                                    |
|               | Z축 슬라이드 커버면에서<br>주축중심까지의 거리         | mm(in)             | 467 (18.4")                                                                                                                    | 487 (19.2")                                                                        |
|               | Rapid Traverse Rate (X/Y/Z)         | m/min(ipm)         | 56/56/56 (2,205/2,205/2,205)                                                                                                   |                                                                                    |
|               | Slide Type                          | -                  | LM Guide                                                                                                                       |                                                                                    |
| ATC           | Tool Shank                          | -                  | BBT30                                                                                                                          |                                                                                    |
|               | Number of Tools                     | ea                 | 21 [Twin Arm : 20, 24]                                                                                                         |                                                                                    |
|               | Max. Tool Dia. (W.T / W.O)          | mm(in)             | Ø80/Ø80 (Ø3.1"/Ø3.1") [Twin Arm : Ø67/Ø125 (Ø2.6"/Ø4.9")]                                                                      |                                                                                    |
|               | Max. Tool Length                    | mm(in)             | 240 (9.4")                                                                                                                     |                                                                                    |
|               | Max. Tool Weight                    | kg(lb)             | 3 (6.6)                                                                                                                        |                                                                                    |
|               | Tool Selection Method               | -                  | Fixed [Twin Arm : Random]                                                                                                      |                                                                                    |
|               | Tool Change Time                    | T-T sec<br>C-C sec | 1.0 [Twin Arm : 1.1]<br>1.8 [Twin Arm : 2.5]                                                                                   |                                                                                    |
| TANK CAPACITY | Coolant Tank                        | ℓ(gal)             | 220 (58.1)                                                                                                                     |                                                                                    |
|               | Lubricating Tank                    | ℓ(gal)             | 2 (0.5)                                                                                                                        |                                                                                    |
|               | Air Consumption                     | 0.5MPa ℓ/min       | 200 (52.8)                                                                                                                     |                                                                                    |
| POWER SUPPLY  | Electric Power Supply               | kVA                | 16                                                                                                                             |                                                                                    |
|               | Thickness of Power Cable            | Sq                 | Over 25                                                                                                                        |                                                                                    |
|               | Voltage                             | V/Hz               | 220/60(50) [380/60(50)]                                                                                                        |                                                                                    |
| MACHINE       | Floor Space (L×W)                   | mm(in)             | 1,640×2,027 (64.6"×79.8")                                                                                                      | 1,900×2,142 (74.8"×84.3")                                                          |
|               | Height                              | mm(in)             | 2,655 (104.5")                                                                                                                 | 2,685 (105.7")                                                                     |
|               | Weight                              | kg(lb)             | 2,600 (5,732)                                                                                                                  | 3,500 (7,716)                                                                      |
| CNC           | Controller                          | -                  | HYUNDAI WIA FANUC i Series - Smart Plus [HYUNDAI-iTROL]                                                                        |                                                                                    |

# Controller

## HYUNDAI WIA FANUC i Series – SMART PLUS

[ ] : Option ☆ Needed technical consultation

| Controlled axis / Display / Accuracy Compensation |                                                                                                                     |
|---------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|
| Control axes                                      | 3 axes (X, Y, Z)<br>4 axes (X, Y, Z, B)                                                                             |
| Simultaneously controlled axes                    | 3 axes [Max. 4 axes]                                                                                                |
| Least setting Unit                                | X, Y, Z axes : 0.001 mm (0.0001 inch)<br>B axes : 1 deg [0.001] deg                                                 |
| Least input increment                             | X, Y, Z axes : 0.001 mm (0.0001 inch)<br>B axes : 1 deg [0.001] deg                                                 |
| Inch / Metric conversion                          |                                                                                                                     |
| High response vector control                      |                                                                                                                     |
| Interlock                                         | All axes / Each axis                                                                                                |
| Machine lock                                      | All axes                                                                                                            |
| Backlash compensation                             | ± 0 ~ 9999 pulses<br>(Rapid traverse / Cutting feed)                                                                |
| Position switch                                   |                                                                                                                     |
| LCD / MDI                                         | 10.4 inch LCD                                                                                                       |
| Feedback                                          | Absolute motor feedback                                                                                             |
| Stored stroke check 1                             | Over travel                                                                                                         |
| Stored stroke check 2, 3                          |                                                                                                                     |
| Stored pitch error compensation                   |                                                                                                                     |
| Operation                                         |                                                                                                                     |
| Automatic operation (Memory)                      |                                                                                                                     |
| MDI operation                                     |                                                                                                                     |
| DNC operation                                     | Needed DNC software / CF card                                                                                       |
| Program restart                                   |                                                                                                                     |
| Wrong operation prevention                        |                                                                                                                     |
| Program check function                            | Dry run, Program check, Z axis Machine lock<br>Stored limit check before move                                       |
| Single block                                      |                                                                                                                     |
| Search function                                   | Program Number / Sequence Number                                                                                    |
| Handle interruption                               |                                                                                                                     |
| Interpolation functions                           |                                                                                                                     |
| Nano interpolation                                |                                                                                                                     |
| Positioning                                       | G00                                                                                                                 |
| Linear interpolation                              | G01                                                                                                                 |
| Circular interpolation                            | G02, G03                                                                                                            |
| Exact stop mode                                   | Single : G09, Continuous : G61                                                                                      |
| Dwell                                             | G04, 0 ~ 9999.999 sec                                                                                               |
| Skip                                              | G31                                                                                                                 |
| Reference position return                         | 1st reference, G28 / 2nd reference, G30<br>Ref. position check, G27                                                 |
| Single direction positioning                      | G60                                                                                                                 |
| Thread synchronous cutting                        | G33                                                                                                                 |
| Helical interpolation                             | Circular + Linear 2 axes (Max.)                                                                                     |
| Feed function / Acc. & Dec. control               |                                                                                                                     |
| Manual feed                                       | Rapid traverse<br>Jog : 0~2,000mm/min (79 ipm)<br>Manual handle : x1, x10, x100 pulses<br>Reference position return |
| Cutting Feed command                              | Direct input F code                                                                                                 |
| Feedrate override                                 | 0 ~ 200% (10% Unit)                                                                                                 |
| Rapid traverse override                           | 1%, 25%, 50%, 100%                                                                                                  |
| Override cancel                                   |                                                                                                                     |
| Feed per minute                                   | G94                                                                                                                 |
| Feed per revolution                               | G95                                                                                                                 |
| Cylindrical interpolation                         | G07.1                                                                                                               |
| Inverse time feed                                 | G93                                                                                                                 |
| Look-ahead block                                  | 200 blocks (AI APC)                                                                                                 |
| Program input                                     |                                                                                                                     |
| Tape Code                                         | EIA / ISO                                                                                                           |
| Optional block skip                               | 9 ea                                                                                                                |
| Absolute / Incremental program                    | G90 / G91                                                                                                           |
| Program stop / end                                | M00, M01 / M02, M30                                                                                                 |
| Maximum command unit                              | ± 999,999.999 mm (± 99,999.9999 inch)                                                                               |
| Plane selection                                   | X-Y, G17 / Z-X, G18 / Y-Z, G19                                                                                      |
| Workpiece coordinate system                       | G52, G53, 48 pairs (G54.1 P1 ~ 48)                                                                                  |
| Manual absolute                                   | Fixed ON                                                                                                            |
| Programmable data input                           | G10                                                                                                                 |
| Sub program call                                  | 10 folds nested                                                                                                     |
| Custom macro                                      | #100 ~ #199, #500 ~ #999                                                                                            |
| Programmable mirror image                         | G51.1, G50.1                                                                                                        |
| G code preventing buffering                       | G4.1                                                                                                                |
| Optional chamfering corner R                      |                                                                                                                     |

| Program input                               |                                                    |
|---------------------------------------------|----------------------------------------------------|
| Polar coordinate command                    | G15, G16                                           |
| Canned cycle                                | G73, G74, G76, G80 ~ G89                           |
| Scaling                                     | G50, G51                                           |
| Coordinate system rotation                  | G68, G69                                           |
| Auxiliary function / Spindle speed function |                                                    |
| Level-up M Code                             | Multi / Bypass M code                              |
| Spindle speed function                      | S & 5 digit, Binary output                         |
| Spindle override                            | 0% ~ 150% (10% Unit)                               |
| Spindle orientation                         | M19                                                |
| Retraction for rigid tapping                |                                                    |
| FSSB high speed rigid tapping               |                                                    |
| Tool function / Tool compensation           |                                                    |
| Tool function                               | Max. T8 digit                                      |
| Tool life management                        |                                                    |
| Tool offset pairs                           | 400 pairs                                          |
| Tool nose / radius compensation             | G40, G41, G42                                      |
| Tool length offset                          | G43, G44, G49                                      |
| Tool offset memory C                        | Tool geometry and wear<br>(Cutter and tool length) |
| Tool length measurement                     | Z axis Input C                                     |
| Editing function                            |                                                    |
| Part program storage size                   | 5,120m (2MB)                                       |
| No. of registerable programs                | 1,000 ea                                           |
| Program protect                             |                                                    |
| Background editing                          |                                                    |
| Extended part program editing               | Copy, move and change of NC program                |
| Memory card program edit                    |                                                    |
| Data input / output & Interface             |                                                    |
| I/O interface                               | CF card, USB memory<br>Embedded Ethernet interface |
| Screen hard copy                            |                                                    |
| External message                            |                                                    |
| External key input                          |                                                    |
| External workpiece number search            |                                                    |
| Automatic data backup                       |                                                    |
| Setting, display and diagnosis              |                                                    |
| Self-diagnosis function                     |                                                    |
| History display & Operation                 | Alarm & Operator message & Operation               |
| Run hour / Parts count display              |                                                    |
| Maintenance information                     |                                                    |
| Actual cutting feedrate display             |                                                    |
| Display of spindle speed / T code           |                                                    |
| Graphic display                             |                                                    |
| Operating monitor screen                    | Spindle / Servo load etc.                          |
| Power consumption monitoring                | Spindle & Servo                                    |
| Spindle / Servo setting screen              |                                                    |
| Multi language display                      | Support 24 languages                               |
| Display language switching                  | Selection of 5 optional Languages                  |
| LCD Screen Saver                            | Screen saver                                       |

| Option                         |                                     |
|--------------------------------|-------------------------------------|
| Fast ethernet                  | Needed option board                 |
| Data server                    | Needed option board                 |
| Protection of data at 8 levels |                                     |
| Additional Axis                |                                     |
| Manual handle feed             | 2/3 units                           |
| Addition of custom macro       | #100~#199, #500~#999, #98000~#98499 |
| Add. Workpiece                 | Max. 300 pairs (G54.1 P1 ~ P300)    |
| AICC II                        | 400 blocks ☆                        |
| Conversational Program         | SmartGuide-i                        |

Figures in inch are converted from metric values.

The FANUC controller specifications are subject to change based on the policy of company CNC supplying.

# Controller

## HYUNDAI-ITROL (SIEMENS 828D)

[ ] : Option ☆ Needed technical consultation

| Controlled axis / Display / Accuracy Compensation                |                                                                                                                                                                     |
|------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Control axes                                                     | 3 axes (X, Y, Z)<br>[4 axes (X, Y, Z, A)]<br>[5 axes (X, Y, Z, A, C)]                                                                                               |
| Simultaneously controlled axes                                   | Max. 4 axes                                                                                                                                                         |
| Least setting Unit                                               | X, Y, Z axes : 0.001 mm (0.0001 inch)<br>[A, C (B) axes : 1 deg [0.001] deg]                                                                                        |
| Least input increment                                            | X, Y, Z축 : 0.001 mm (0.0001 inch)<br>[A, C (B) axes : 1 deg [0.001] deg]                                                                                            |
| Inch / Metric changeover                                         | G70 (inch) / G71 (metric)                                                                                                                                           |
| Interlock                                                        | All axes / Each axis                                                                                                                                                |
| Pitch error compensation                                         |                                                                                                                                                                     |
| Feedforward control                                              |                                                                                                                                                                     |
| LCD / MDI                                                        | 10.4 inch color LCD<br>[15 inch color LCD (With Touch panel)]                                                                                                       |
| Keyboard                                                         | QWERTY full keyboard                                                                                                                                                |
| Stored stroke check                                              | Over travel                                                                                                                                                         |
| Operation                                                        |                                                                                                                                                                     |
| Automatic operation                                              |                                                                                                                                                                     |
| MDI operation                                                    |                                                                                                                                                                     |
| Program restart                                                  |                                                                                                                                                                     |
| Program check function                                           | Dry run / Program check / Machine lock                                                                                                                              |
| Single block                                                     |                                                                                                                                                                     |
| Block search                                                     | Block search                                                                                                                                                        |
| Reposition                                                       |                                                                                                                                                                     |
| Working area limit                                               | Working area limitations                                                                                                                                            |
| Interpolation functions                                          |                                                                                                                                                                     |
| Positioning                                                      | G00                                                                                                                                                                 |
| Linear interpolation                                             | G01                                                                                                                                                                 |
| Circular interpolation                                           | Circular Interpolation CW (G02)<br>Circular Interpolation CCW (G03)                                                                                                 |
| Exact position stop                                              | Single block exact stop (G09)<br>Exact stop G60 (G601, G602, G603)                                                                                                  |
| Dwell                                                            | Dwell (G04)                                                                                                                                                         |
| Reference position return                                        | Return to reference point<br>Return to 2nd reference point                                                                                                          |
| Helical interpolation                                            |                                                                                                                                                                     |
| Spline interpolation                                             | Non-uniform rational B splines                                                                                                                                      |
| Compressor for 3-axis machining<br>(Improving machining quality) | Compcad /Compcurv (Cycle 832)                                                                                                                                       |
| Feed function / Acc. & Dec. control                              |                                                                                                                                                                     |
| Manual feed                                                      | Rapid traverse<br>Jog<br>Manual handle<br>Reference position return                                                                                                 |
| Cutting Feed command                                             | Direct input F code                                                                                                                                                 |
| Feedrate override                                                | 0 ~ 200% (10% Unit)                                                                                                                                                 |
| Rapid traverse override                                          | 1%, 25%, 50%, 100%                                                                                                                                                  |
| Feed per minute                                                  | G94                                                                                                                                                                 |
| Feed per revolution                                              | G95                                                                                                                                                                 |
| Look-ahead block                                                 | 300 block<br>450 block : (SW28X Mold)<br>[600 block]                                                                                                                |
| Program input                                                    |                                                                                                                                                                     |
| ISO correspondence                                               | G291(ISO)/G290 (SIEMENS)<br>(ISO G Code system-A)                                                                                                                   |
| Optional block skip                                              | 2                                                                                                                                                                   |
| Program stop / end                                               | M00, M01 / M02, M30                                                                                                                                                 |
| Maximum command unit                                             | ± 999,999.999 mm, ± 99,999.9999 inch                                                                                                                                |
| Plane selection                                                  | X-Y : G17, X-Z : G18, Y-Z : G19<br>G54 ~ G57, G505~G549<br>G500 (Basic frame - settable zero offset)<br>G53 (Work offset non modal)<br>G153 (basic frame non modal) |
| Workpiece coordinate system                                      |                                                                                                                                                                     |
| Sub program call                                                 | 11 folds nested                                                                                                                                                     |
| G code preventing buffering                                      | STOPRE                                                                                                                                                              |
| Drilling/Milling cycle                                           | Programing (Cycle 82, 83, 84, 840)                                                                                                                                  |
| User cycle                                                       |                                                                                                                                                                     |

| Auxiliary function / Spindle speed function |                                                                                                                                                                         |
|---------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Auxiliary function                          | M Code 4 digit                                                                                                                                                          |
| Spindle speed function                      | S Code 5 digit                                                                                                                                                          |
| Spindle override                            | 0% ~ 150% (10% Unit)                                                                                                                                                    |
| Spindle orientation                         | SPOS                                                                                                                                                                    |
| Rigid tapping                               |                                                                                                                                                                         |
| Automatic mode Interchange                  | Spindle / Axis mode                                                                                                                                                     |
| Constant surface speed control              | G96, G97                                                                                                                                                                |
| Spindle speed limitation                    | LIMS                                                                                                                                                                    |
| Tool function / Tool compensation           |                                                                                                                                                                         |
| Tool function                               | Tool number & Tool name<br>Tool : T + Offset : D                                                                                                                        |
| Tool life management                        |                                                                                                                                                                         |
| Tools in tool list                          | 256 ea<br>768 ea : (SW28X Mold)                                                                                                                                         |
| Cutting Edges in tool list                  | 512 ea<br>1,536 ea : (SW28X Mold)                                                                                                                                       |
| Tool radius compensation                    | ISO (G40, G41, G42)                                                                                                                                                     |
| Tool length offset                          |                                                                                                                                                                         |
| Geometry / Wear compensation                |                                                                                                                                                                         |
| Measurement of tool length                  |                                                                                                                                                                         |
| Tool management function                    |                                                                                                                                                                         |
| Editing function                            |                                                                                                                                                                         |
| Part program storage size                   | 5MB<br>10MB : (SW28X Mold)                                                                                                                                              |
| No. of registerable programs                | 750 ea                                                                                                                                                                  |
| External Storage devices                    | Local network, Server, USB, Flash drive                                                                                                                                 |
| Background editing                          |                                                                                                                                                                         |
| Extended part program editing               | Copy, move and change of NC program                                                                                                                                     |
| Memory card program edit                    |                                                                                                                                                                         |
| Data input / output & Interface             |                                                                                                                                                                         |
| I/O interface                               | CF card interface (ONLY 10.4")<br>USB memory interface<br>Embedded Ethernet memory interface                                                                            |
| Screenshot                                  |                                                                                                                                                                         |
| Setting, display and diagnosis              |                                                                                                                                                                         |
| Self-diagnosis function                     |                                                                                                                                                                         |
| History display & Operation                 | Alarm & Operator message & Operation                                                                                                                                    |
| Run hour / Parts count display              |                                                                                                                                                                         |
| Maintenance information                     |                                                                                                                                                                         |
| Actual cutting feedrate display             |                                                                                                                                                                         |
| Display of spindle speed / T code           |                                                                                                                                                                         |
| Graphic display                             |                                                                                                                                                                         |
| Operating monitor screen                    | Spindle / Servo load etc.                                                                                                                                               |
| Multi language display                      | Support 9 languages<br>Chinese (Simplified/Traditional), English,<br>French, German, Italian, Korean,<br>Portuguese, Spanish<br>[☆ 22 Support languages : Inquiry need] |
| LCD Screen Saver                            | Screen saver & Motion sensing                                                                                                                                           |
| Option                                      |                                                                                                                                                                         |
| Additional optional block skip              | 10 ea                                                                                                                                                                   |
| Additional axis control                     |                                                                                                                                                                         |
| Contour handwheel                           |                                                                                                                                                                         |
| 3D simulation                               |                                                                                                                                                                         |
| Real time simulation                        |                                                                                                                                                                         |
| ShopMill                                    | Machining step programming for milling                                                                                                                                  |



You Tube HYUNDAI WIA MT  
[www.youtube.com/HYUNDAIWIAMT](http://www.youtube.com/HYUNDAIWIAMT)

## EXPERIENCE THE NEW TECHNOLOGY

With its top-quality HYUNDAI WIA machine tool creates a new and better world.



<http://machine.hyundai-wia.com>  
HYUNDAI WIA Machine Tools  
Global Links

### HEADQUARTER

**Changwon Technical Center/R&D Center/Factory** 153, Jeongdong-ro, Seongsan-gu, Changwon-si, Gyeongsangnam-do, Korea TEL : +82 55 280 9114 FAX : +82 55 282 9114

**Overseas Sales Team /R&D Center** 37, Cheoldobangmulgwan-ro, Uliwang-si, Gyeonggi-do, Korea TEL : +82 31 8090 2539

### OVERSEAS OFFICES

**HYUNDAI WIA Machine America corp.** 450 Commerce Blvd, Carlstadt, NJ 07072, USA TEL : +1-201-987-7298

**HYUNDAI WIA Europe GmbH** Alexander-Fleming-Ring 57, 65428 Rüsselsheim Germany TEL : +49-0-6142-9256-0

**HYUNDAI WIA Machine Tools China** 2-3F, Bldg6, No.1535 Hongmei Road, Xuhui District, Shanghai, China TEL : +86-21-6427-9885

**India Branch Office** #4/169, 1st Floor, LOTTE BLDG, Rajiv Gandhi Salai, (OMR), Kandanchavadi, Chennai - 600096, Tamilnadu, India TEL : +91-76-0490-3348

**Vietnam Branch Office** Flat number 05, Service and Trade Center of Viet Huong Industrial Zone, Highway 13, Thuan Giao, Thuan An, Binh Duong, Vietnam TEL : +84-3-5399-5099

2021-07 001.002 KOR