



Metered Transformer Cabinet

U6500-X-PGE | 800 Amps




U6500-X-PGE

Approved for 800 Amps applications, this larger transformer cabinet can be used for many common applications such as commercial projects, EV charging and pump stations.

Features

- 800 Amps
- Overhead/underground entry and exit
- G90 galvanized steel with gray powder coat finish
- Three phase, four wire
- CT rack factory-installed
- NEMA 3R enclosure
- UL listed
- Manufactured in the USA

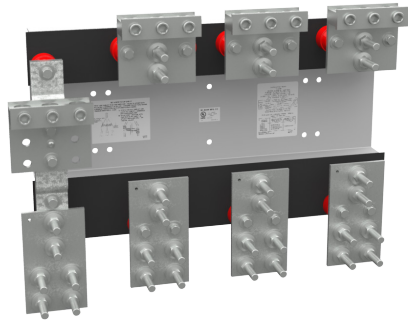

CT rack


CT Rack Features

- Line side: Four studs spaced 1 3/4" on centers for phases and neutral
- Load side: Three position connectors per phase and neutral for #4-600 kcmil single conductor
 - Each port dual conductor rated for #1-250 kcmil conductors
- UL listed
- Manufactured in the USA

Common Applications



Commercial

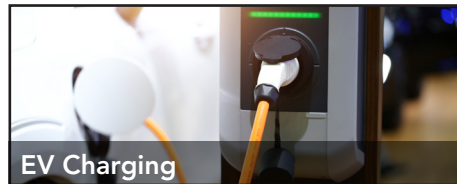

EV Charging



Pump Stations


Please consult serving utility for their requirements prior to ordering, mounting or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation. WARNING: This product can expose you to Chromium (hexavalent compounds) which is known to the State of California to cause cancer and/or birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.





Metered Transformer Cabinet

U6500-X-PGE | 800 Amps

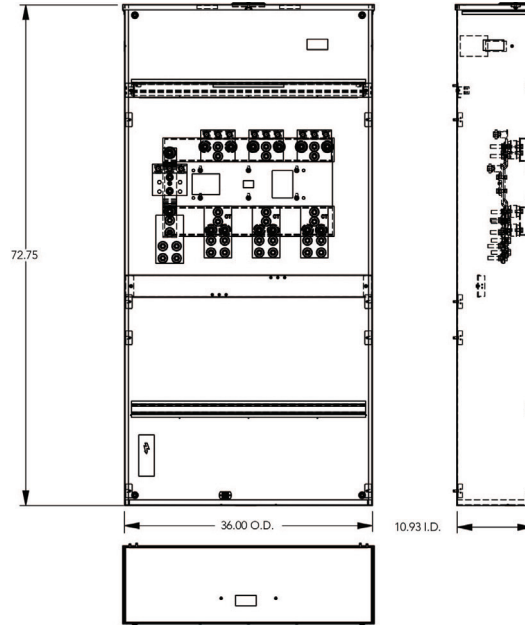

U6500-X-PGE

800 Amps | 15 Terminals | Transocket | Ring Type | 3Ø4W

Catalog Number	Service	Hub	Dimensions		
			D"	W"	H"
U6500-X-PGE	OH/UG	C.P.	11	36	72 $\frac{3}{4}$

Notes

- **Knockouts:** Does not come with knockouts.
- **Cover:** This cabinet has a screw cover lift-off door.
- **Mounting:** Check with utility for mounting requirements.

Please consult serving utility for their requirements prior to ordering, mounting or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation. WARNING: This product can expose you to Chromium (hexavalent compounds) which is known to the State of California to cause cancer and/or birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

