

# **System Instruction Manual**

LSC Centralized Lubrication System



LEP LRMP LRBP LIMP LIBP


# Navigation

System Overview	2
System Structure and Working Principle	3 – 4
Technical Parameter	5 – 6
Overall Dimensions	7 – 8
Installation Instructions	9
Operation of Filling Equipment	10
System Commissioning/Maintenance and Servicing	11 – 13
Fault Analysis and Elimination	14
Transport and Storage	14
After Sales Service	14
Order Information	15 – 20

# **System Overview**

LSC Progressive series centralized lubrication systems have been widely used in industries like wind power, mining, metallurgy, machine tools, textiles, food, ports, commercial vehicles, construction machinery, and heavy mechanical equipment, etc.

The system supplies grease to all necessary lubrication parts as required through a complete grease supply system. It can reduce the friction resistance, reduce contact wear and decrease the friction surface temperature. Meanwhile, it plays a supporting role of anti-rust, shock absorption and sealing.

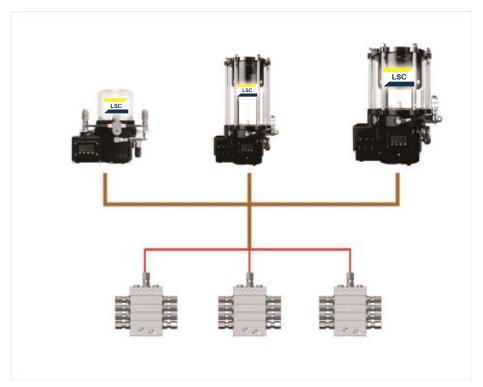

Layout of Progressive System

Product	Function Principle	Grease Thickness till	Metering Quantity per Pump Element ml/Min	Reservoir Liter	Operating Max. Pressure in bar	Operating Max. Pressure in psi	Power Supply	Max. Pump Elements
LEP	Piston Pump/Paddle Mode	Up to 2	1.5-4.5	1-2	350 bar	5075	12/24 V DC 220V AC	3
LRMP	Piston Pump/Paddle Mode	Up to 2	1.5-4.5	2-8	350 bar	5075	12/24 V DC 220V AC	3
LRBP	Piston Pump/Paddle Mode	Up to 2	1.5-4.5	4-20	350 bar	5075	12/24 V DC 220V AC	4
LIMP	Piston Pump/Spring Mode	Up to 2	1.5-4.5	2-8	350 bar	5075	12/24 V DC 220V AC	3
LIBP	Piston Pump/Spring Mode	Up to 2	1.5-4.5	4-20	350 bar	5075	12/24 V DC 220V AC	4

# System Structure and Working Principle

LSC Progressive series centralized lubrication system is connected to all levels of the dispenser in sequence using the lubrication pump by alternately supplying the grease to each lubrication point. A Sensor is provided on the dispenser to monitor the operating status of the entire system and control the grease amount by operating time.

The system can also be equipped with a pressure gauge between the lubrication pump and the dispenser to give a early warning of fault.

#### System Composition

The system is composed of lubrication pump, monitor, progressive distributor, sensor (optional), grease hose and accessories.

## **Working Principle**

Operate according to the preset program until the end of stop countdown. Start the lubrication pump, the grease under pressure will be transported to the dispenser through the main lubrication hose. Then the dispenser will deliver the grease to each lube point.

The sensor of the dispenser will detect the grease supply amount of the system in real time and send it back to the monitor. When the filling amount reaches the preset valve, the lubrication pump stops working. The count on the monitor increase by 1, the entire grease supply process of the system ends, and it enters to the next working cycle.

#### **Lubrication Pump**

#### Stirring Plate Mode

Stirring plate mode lubrication pump:

#### LEP/LRMP/LRBP

Stirring plate is installed in the grease reservoir. When the motor is running, the grease is cut by the stirring plate and moves down under gravity to feed to the suction nozzle of plunger pump through the scraper.

- 1. Monitor
- 2. Power Input Connector
- 3. Alarm Output Connector
- 4. Sensor Input Connector
- 5. Reservoir
- 6. Grease Return Port (only with returnable Safety Valve)
- 7. Stirring Plate
- 8. Safety Valve
- 9. Grease Outlet Port




# System Structure and Working Principle

#### **Spring Mode**

Stirring plate mode lubrication pump: LIMP/LIBP

Spring Mode pump is provided within the grease reservoir. Under action of spring, the piston compresses and delivers the grease to the suction of the plunger pump.


- 1. Power Input Connector
- 2. Alarm Output Connector
- 3. Sensor Input Connector
- 4. Spring
- 5. Spring Piston
- 6. Reservoir
- 7. Grease Return Port (only with returnable Safety Valve)
- 8. Safety Valve
- 9. Grease Outlet Port
- 10. Grease Refilling Nozzle
- 11. Monitor

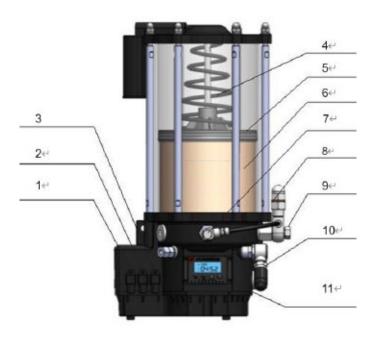

#### Distributor

The progressive dispenser is actuated in sequence by means of plunger to supply grease to the lubrication point in a progressive way. The built-in indicator rod can be used to observe the running state of the entire dispenser. By installing the sensor, the operation conditions of the entire dispenser can be detected. In the event of blocking, alarm can be triggered. According to the program, multiple outlets can be combined to achieve double volume of one lubrication point.



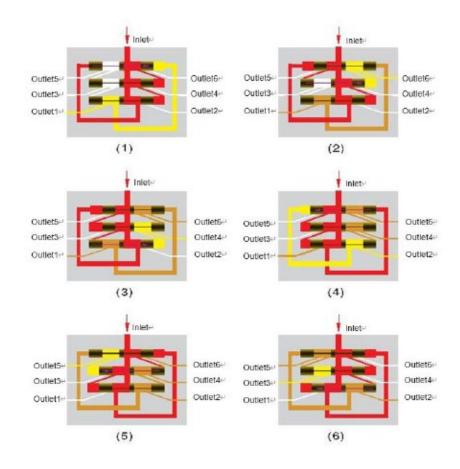

# **Technical Parameter**

## **Lubrication Pump**

	LEP	LRMP	LRBP	LIMP	LIBP	
Function principle:		electrically operated piston pump				
Metering quantity Grease:		1.5–4,5 ml/Min				
Working principle:	Stirring Plate	Stirring Plate	Spring	Stirring Plate	Spring	
Reservoir Volume:	1/2	2/4/6/8	4/8/10/15/20	2/4/6/8	4/8/10/15/20	
Outlets:	1	3	4	3	4	
Lubricant:		Grease up to NLGI 2				
Operating Pressure:		350 bar/5075 psi				
Operating Temperature:		−40 to +70 °C				
Protection Class:	IP 65	IP 65	IP 66	IP 65	IP 66	
Line Connection:		G1/4				
Electrical Connection:	12 or 24V DC	12 or 24V DC/220V AC	12 or 24V DC/220V AC	12 or 24V DC/220V AC	12 or 24V DC/220V AC	
Mounting Position:	Vertical	Vertical/horizontal	Vertical/horizontal	Vertical/horizontal	Vertical/horizontal	
Options:	Pressure Sensor/ Main Switch/ Refill Coupling/	Pressure Sensor/ Main Switch/ Refill Coupling/ Grease Level Sensor/Pressure Gauge				

Signal Output:

# Monitor (Integrated)



Control Mode:

Operating Voltage:

12/24V DC/220V AC

Off Time:

1-30 hours

Operating Mode:

Run according to the preset time

Signal Output:

Grease Level/Fault(due to pressure)

## Monitor (External)




Control Mode: ECU Microcomputer Control
Operating Voltage: 12/24V DC/220V AC
Off Time: 1-30 hours
Operating Mode: Run according to the preset time

Grease Level/Fault(due to pressure)

# **Technical Parameter**

## Distributor (VPKA/VPKB)

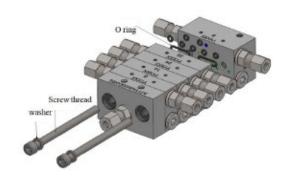

Function principle: Block metering device

Outlets: 6-18

**Lubricant:** Grease up to NLGI 2


Input Pressure:300 barConnection Input:M10\*1Output Pressure:200 barConnection Output:M10\*1Start Pressure:20 bar

Displacement: 0.08 - 1.60 ml/cyWorking Temperature: -25 to +70 °C

Material: Stee

Surface treatment (Coating): Zn-Ni plated (free of Cr-VI)

#### Distributor (SSV/SSVA/SSVD)



Function principle: Block metering device

Outlets: 6-20

**Lubricant:** Grease up to NLGI 2

Input Pressure: 350 bar

Connection Input: M10\*1

Output Pressure: 200 bar

Connection Output: M10\*1

Start Pressure: 20 bar

Displacement: 0.2 ml/cy

Working Temperature: -25 to +70 °C

Material: Stee

Surface treatment (Coating): Zn-Ni plated (free of Cr-VI)

#### Sensor




Using the Hall Sensor to detect, and feedback the pulse signal to the monitor. With NPN 3-wire and PNP 3-wire system.


NPN, PNP 3-wire system provides active contacts:



# **Overall Dimensions**


## LEP/LRMP/LIMP/LRBP/LIBP

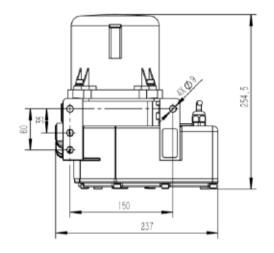



LEP

100

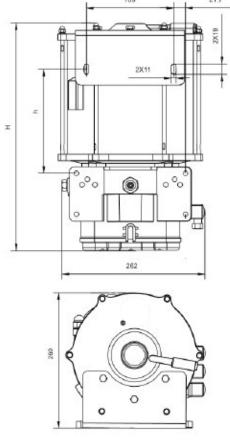


LRMP/LIMP

LRBP/LIBP

	Reservoir Volume (L)	Width (mm)	Depth (mm)	Height (mm)
150	1	227	212	255
LEP	2	237	212	378
	2			385
LRMP/LIMP	4	285	210	485
LKIVIF/LIIVIF	6			585
	8			685
	4			418
LRBP/LIBP	8			523
	10	262	260	576
	15			771
	20			848


# **Overall Dimensions**

# Distributor (SSV/SSVA/SSVD)

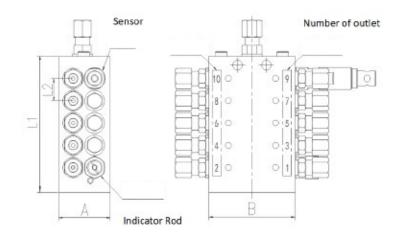

Outlets	A (mm)	B (mm)	L1 (mm)	L2 (mm)	L3 (mm)
6			62		
8			77		
10			92		
12	26	60	107	1.5	20
14	36	60	122	15	20
16			137		
18			152		
20			167		


## Distributor (SSV/SSVA/SSVD)

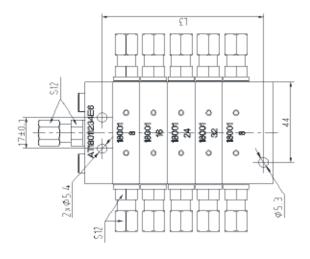

# **Monitor (External)**

Height (mm)	Depth (mm)	Width (mm)
44	287.5	78

Outlets	Width (mm)	Depth (mm)	L1 (mm)	L2 (mm)	L3 (mm)
6			71		57.2
8			86		72.0
10	56	26	101	1.5	86.7
12	20	36	116	15	101.5
14			131		116.2
16			146		131.0

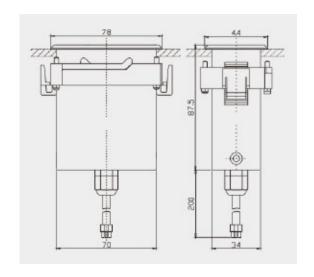

## **Installation Instructions**

#### Instruction for Installation of Pump

- 1. It is forbidden to install with the electricity "ON".
- 2. When installing, make sure that the grease level on the reservoir is clear and clean.
- 3. The mounting surface should be flat, and the installation connection should be reliable.
- 4. Distance from heat source should be more than 1 meter.

#### Instruction for Installation of Distributor

- 1. Distributors should be installed firmly for convenient maintenance.
- 2. Keep the inlets and outlets of distributors clean.
- 3. Distributors should be placed close to lube points; the longest feed line of progressive distributors needs to be less than 25 meters (Note: Varies according to different grease and temperature).

#### Instruction for Installation of Hoses

- 1. The grease hoses should be cut vertically in axial direction, the orifice can't be broken or scratched, what's more, the hoses should not be flattened.
- 2. During installation, the hoses must be kept clean and free of contaminants.
- 3. Hoses should be short to reduce the system pressure loss, thus ensuring smooth flow.
- 4. Minimum bending radius of hoses:
  - 7.9\*14.3mm resin hose R >100mm
  - 4.0\*8.6mm resin hose R >60mm
- 5. Hose joints must be securely connected without leakage.

#### Instruction for Pump Reservoir Refilling

- 1. The position of grease level upper limit label is set according to the product capacity.
- 2. The lubrication pump must first be exhausted when filling for the first time. The exhaust vent position is set because when filling for the first time, it should exceed the grease level upper limit until reaching the vent position to exhaust. After the air is completely exhausted, the piston will automatically seal the exhaust vent.
- 3. When refilling later, just fill to the grease level upper limit to prevent grease spill and foreign matter from entering the reservoir.
- 4. When fill and exhaust for the first time, in order to completely exhaust the air in the reservoir, there will be a small amount of grease overflowing from the exhaust vent, which is within the normal allowable range, just wipe and clean it. 5. If there is air in the reservoir when refilling later, then implement in the same way as filling for the first time to fill the grease to the position of exhaust vent, after the air is completely exhausted, the piston will automatically seal the exhaust vent.

# **Operation of Refilling Equipment**

#### Operating procedures of grease gun

Thanks to the special transfer coupling for grease gun (manual, pneumatic, electrical), the refilling nozzle of lubrication pump and grease gun can be easily connected with each other for pump refilling.

Before connecting the grease gun and refilling nozzle of lubrication pump, it is necessary to read the instruction for pump reservoir refilling again to make sure no air go into the reservoir during the refilling procedure.



# Operating procedures of Grease Refilling Device

By high pressure grease transfer unit including high pressure hoses, connectors and pressure relief valve, the refilling nozzle of lubrication pump and grease refilling devices (manual, pneumatic, electrical)can be easily connected with each other for pump refilling.


Before connecting the grease refilling devices and refilling nozzle of lubrication pump, it is necessary to read the instruction for pump reservoir refilling again to make sure no air go into the reservoir during the refilling procedure.



# **System Commissioning**

#### **Before System Running**

- 1. Before connecting the grease pump to the system, run the pump to confirm that it may normally output grease.
- 2. Run the monitor and set the lubrication interval as demanded.

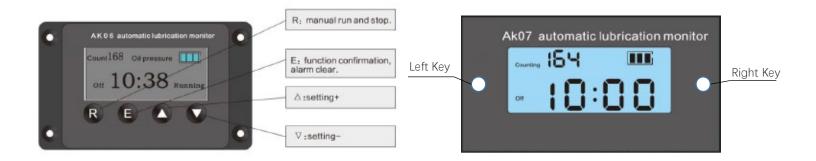

#### **Setting for Integrated Monitor:**

By pressing both " $\blacktriangle$ " and " $\blacktriangledown$ " for 4 seconds and over, press the "E" to enter the setting mode. It will be locked again after the setting mode is exited.

The "E" in turn to select the setting items "1P, 2P, 3P and 4P" to confirm.

1P: Click " $\blacktriangle$ " or " $\blacktriangledown$ " to set the off time (1 to 30 hours, can be customized)

2P: Set the number of detection pluses (0-99, can be customized)

3P: Click " $\blacktriangle$ " or " $\blacktriangledown$ " to set the running time (1-60 mins, can be customized)

4P: Click " $\blacktriangle$ " or " $\blacktriangledown$ " to set the low temperature standby value (-50°C to 0°C).

Click "E" to confirm the entering of off status.

#### **Setting for External Monitor:**

Explanation of parameters:

1P: Off time: 1 to 30 hours 2P: Refuel Volume: 0 to 99ml 3P: Refuel Route: 1 to 30 mins

4P: Low temperature protection: -50°C to 0°C 5P: Quantitative accuracy: 1 to 10 (0.1ml − 1.0 ml)


Press and hold the "Right" key and then press the "Left" key. First release the "Right" key and then the "Left" to enter the interface setting 1P. Make setting by clicking the "Left" key. Upon completion of setting, press the "Right" key to switch to the next parameter.

Upon completion of parameter setting, press the "Right" key to save the parameters and return to the "OFF" status.

# **System Commissioning**

#### **Monitor Interface**



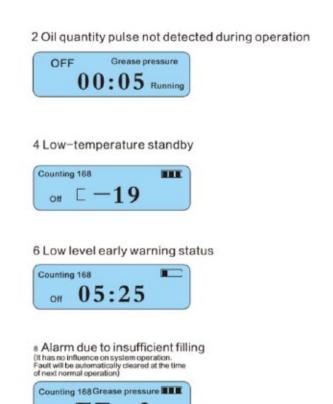

#### **During System Running**

- 1. Press the manual operation key "R" (press the Left key for an external monitor) to make the grease pump work completely. Briefly press again at an interval of every X mins (X=the set value of 3P) after shutdown to make the grease pump operate again until that each lube point discharges grease (Check one by one to confirm normal grease delivery if all the indicator rods are fully extended).
- 2. If no grease flows out from some lube points, remove their pipelines and observe whether grease may flow out from the distributor outlet. If yes, confirm whether the lubrication pipelines and connector is clogged or leaked. If no, the distributor is faulty. In such case, replace it with a new one and re-start the system until grease may flow out from every lube point.

# **System Commissioning**


### After System Running (Maintenance and Servicing)


- 1. Start manually the grease pump to observe that the monitor is running normally.
- 2. Check that fresh grease may flow out from all the lube points.
- 3. Check that the tube bundle is fixed, and wiring harness is connected firm.
- 4. For maintenance and repair of the lubrication system, replace all the sealing elements such as combination gasket, aluminum gasket, etc.
- 5. Check that all the pipelines are not damaged or fractured.
- 6. Check the level of the grease reservoir, refill it if necessary.
- 7. Make records of maintenance.
- 8. Maintenance of block type progressive distributor (SSV/SSVA/SSVD): When storage time or stoppage time reaches 6 months, it is necessary to use the same grade grease running dispenser to drain the grease and drain out the internal grease.

The method as follows:

- Step 1: Screw out one bolt and washer, start lubrication system to make distributor working. Discharging time should not be less than 1 min. Screw block and washer back as original after finish discharging.
- Step 2: Discharge waste grease of another hole as step 1.
- Step 3: After 2 holes both finish discharging, start lubrication system and operate at least 2 circles, make sure the distributors work normally.



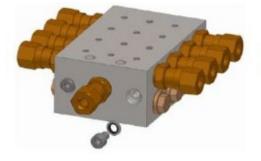

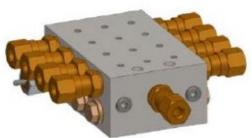

Step 1

Step 2

Step 3

# **Fault Analysis and Elimination**

Faults	Reasons	Solution	
No Grease comes out from lubrication	The motor does not rotate	Test the motor and power supply	
pump	Lubricant is completely pumped out	Exhaust the air	
Lubrication pump pressure is insufficient	Plunger pressure is low	Replace plunger	
Eublication pump pressure is insumicient	Safety valve failure	Replace safety valve	
Fault code EE-2	System blocked	Check the faulted dispenser and change if necessary	
Fault code EE-1	Grease Level insufficient	Fill with grease	

# Transport and Storage

## **Transport**

During loading unloading, be careful and avoid upside down.

During loading/unloading and transportation, avoid collision with other items.

#### Storage

The products should be stored in a ventilated and dry warehouse free from direct sunlight and without corrosive gas in the air.

Close all open pipelines to prevent dust and impurities from entering.


The products should be packed neatly in the warehouse and ensure the ventilation, meanwhile pay attention to the logo on the packing box and avoid upside down. The packing box should keep a distance of at least 100mm from the ground and wall.

## **After Sales Service**

The service network of LSC is worldwide. You can contact us for the information for local LSC Brand or Dealer to get the technology or business support.


sales@lubespec.ca

# **Order Information-LEP Serie**

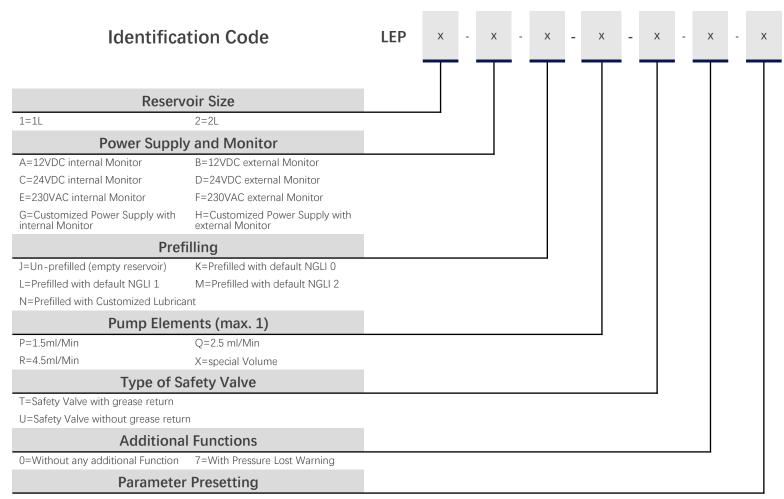


Y=Default Setting by Lubmann Z=Customized Setting based on Requirement


## Order Information—LRMP Serie

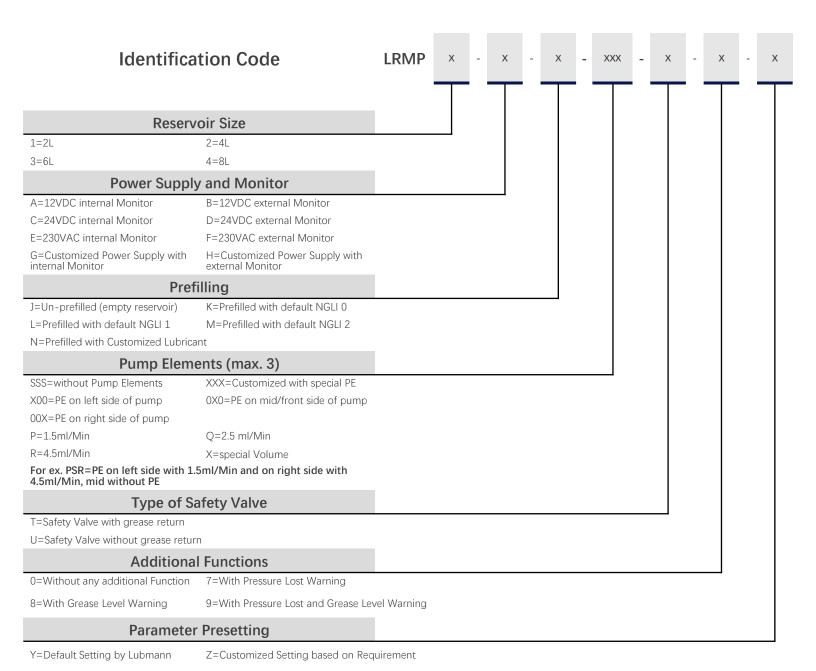


## Order Information—LRBP Serie

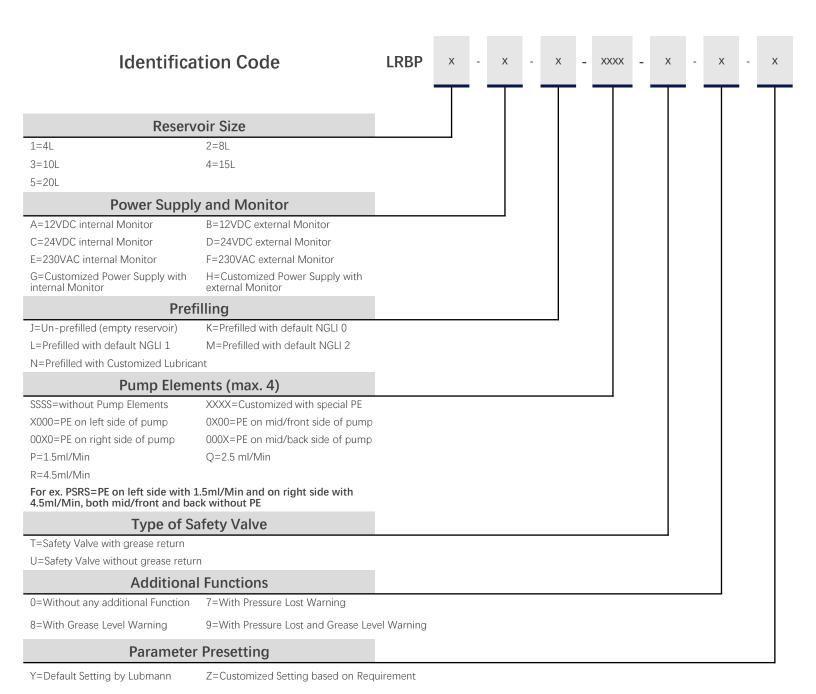

## Order Information—LIMP Serie

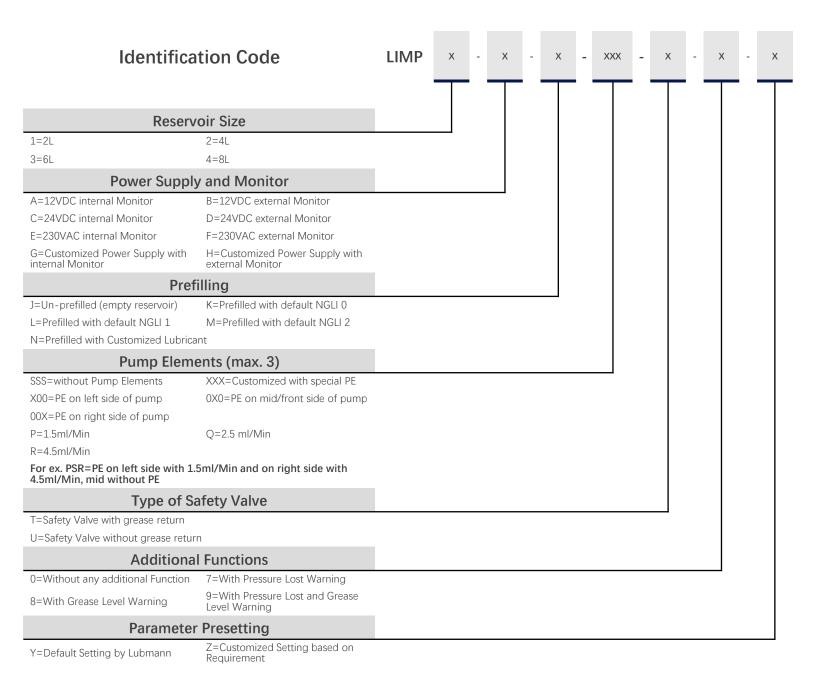

## Order Information—LIBP Serie

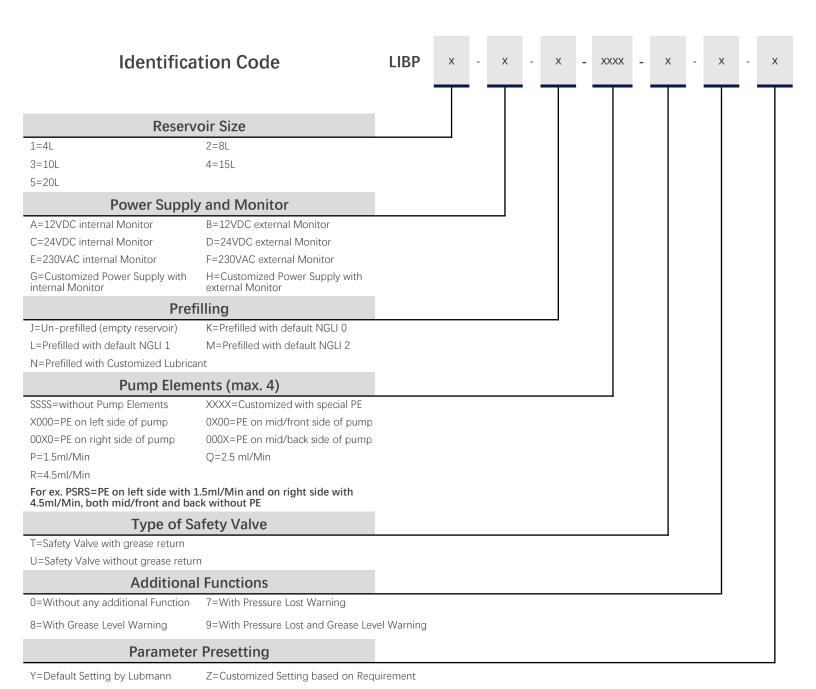

# Order Information - Progressive LR VPKA/VPKB

**Identification Code** 

LR-VPK x - x - x - xx - x

#### Block Type

A=VPKA Type B=VPKB Type

#### Number of Middle piece

3=2 middle pieces 4=3 middle pieces 5=4 middle pieces 6=5 middle pieces 7=6 middle pieces 8=7 middle pieces

Min. 2 and Max. 7 middle pieces

#### Number of non-blinded Outlets

0= no blinded Outlets X=Number of non-blinded Outlets

X <= ((Number of Middle piece+1)\*2)

#### Type of all Middle Pieces

8=Piece 8 (0.08 ml/cy per Outlet) 16=Piece 16 (0.16 ml/cy per Outlet) 24=Piece 24 (0.24 ml/cy per Outlet) 32=Piece 32 (0.32 ml/cy per Outlet) 64=Piece 64 (0.64 ml/cy per Outlet) 96=Piece 96 (0.96 ml/cy per Outlet) 128=Piece 128 (1.28 ml/cy per Outlet) 160=Piece 160 (1.60 ml/cy per Outlet)

L= section has been merged and grease comes out from Left-Side

R= section has been merged and grease comes out from Right-Side

AR= section has not been merged, grease comes out from **Both Sides**, on Right-Side the outlet of the section has been connected with the Right-outlet of the next section by an external 2 to 1 outlet connector (**PMU-VPKO21**)

AL= section has not been merged, grease comes out from **Both Sides**, on Left-Side the outlet of the section has been connected with the Left-outlet of the next section by an external 2 to 1 outlet connector (**PMU-VPKO21**)

ARL= section has not been merged, grease comes out from **Both Sides**, the outlets on both sides of the section have been connected with the corresponding outlets of the next section by 2 external 2 to 1 outlet connectors (**PMU-VPKO21**), and the next section must **not be merged** BR= section has not been merged, grease comes out from **Both Sides**, on Right-Side the outlet of the section has been connected with the Right-outlet of the next section by an external 2 to 0 outlet connector (**PMU-VPKO20**), and the next section **must be merged**, **and keeps the grease comes out from Left-Side of the section** 

BL= section has not been merged, grease comes out from **Both Sides**, on Left-Side the outlet of the section has been connected with the Left-outlet of the next section by an external 2 to 0 outlet connector (**PMU-VPKO20**), and the next section **must be merged, and keeps the grease comes out from Right-Side of the section** 

For ex. 8-8L-32AL-16AR-16=5 middle pieces, the sequence of the middle piece from Top piece to bottom piece is 1(8-8) 2(16-0) 3(0-32) 4(64-0) 5(16-32)

Only VPKB has piece with flowrate 64/96/128/160

#### Type of bottom Piece

C=Piece 8 (0.08 ml/cy per Outlet) D=Piece 16 (0.16 ml/cy per Outlet)

E=Piece 24 (0.24 ml/cy per Outlet)

L=section has been merged and grease comes out from Left Side

R=section has been merged and grease comes out from Right Side

Only Piece 8,16,24 can be chosen as the bottom Piece.

#### **Additional Functions**

N=Without any additional Function P=With Indicator Rod

Q=With Hall Sensor M=With Indicator Rod and Hall Sensor

