

Garrett® G-Series G35-900

Horsepower: 550 - 900
Displacement: 2.5L - 5.5L




Features


- Garrett® G Series compressor aerodynamics for maximum HP
- 62mm turbocharger compressor option
- New turbine wheel aero constructed of MAR-M alloy rated for up to 1050° C
- Stainless steel turbine housing options rated for up to 1050° C
- Oil restrictor and water fittings included
- Fully machined speed sensor and pressure ports



COMPRESSOR MAP

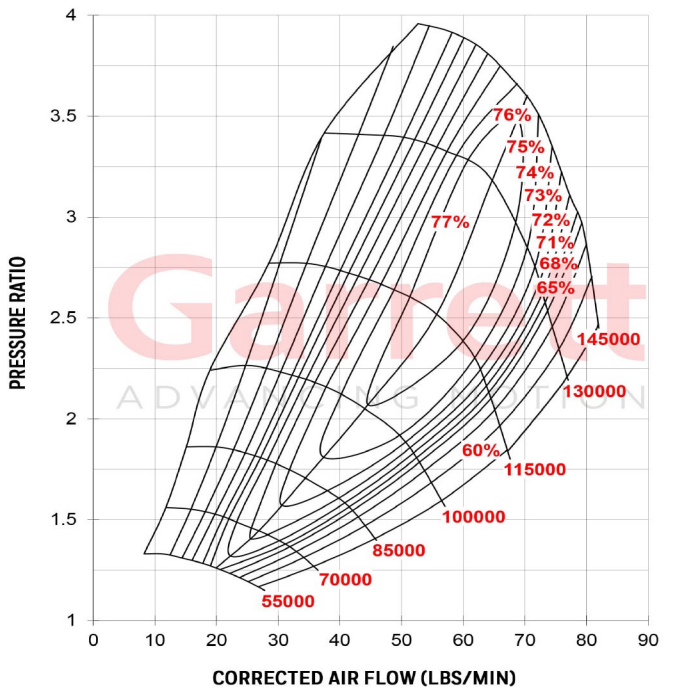

EXHAUST FLOW CHART

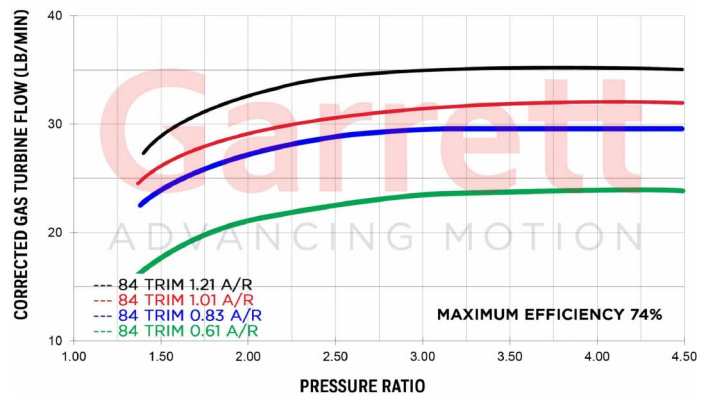

G35-900 Reference Data

	Compressor				Turbine			
	Inducer	Exducer	Trim	A/R	Inducer	Exducer	Trim	
	62mm	76mm	65	0.72	68mm	62mm	84	
G35-900 Standard Rotation Supercore PN			Turbine Kit PN	A/R	Inlet	Outlet	Wastegate	Divided
880695-5001S			740902-0102	0.61	V-Band	V-Band	Free Float	N
			740902-0103	0.83	V-Band	V-band	Free Float	N
			740902-0104	1.01	V-Band	V-band	Free Float	N
			740902-0105	1.21	V-Band	V-band	Free Float	N
G35-900 Reverse Rotation Supercore PN			Turbine Kit PN	A/R	Inlet	Outlet	Wastegate	Divided
880696-5001S			740902-0112	0.61	V-Band	V-Band	Free Float	N
			740902-0113	0.83	V-Band	V-band	Free Float	N
			740902-0114	1.01	V-Band	V-band	Free Float	N
			740902-0115	1.21	V-Band	V-band	Free Float	N

*Additional turbine housing options coming soon. Please check GarrettMotion.com for latest updates.



2 Cummins Drive, Somerton VIC 3062
Phone: (+613) 9308 0600 | Email: turbo@rmturbochargers.com.au
Web: www.rmturbochargers.com.au