




Casey Concrete Ltd. 5 PIECES PAVER SET


caseyltd.ca

PLEASE NOTE:


Products are made from natural material sources and therefore colour variations are common. Efflorescence is also a common occurrence with all concrete and concrete products. Efflorescence does not affect the quality of the product and will fade over time or can be removed with cleaning products.

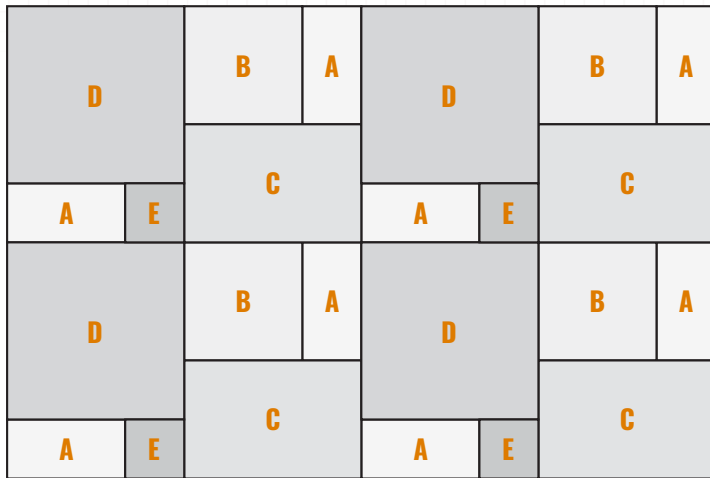

PALLET LAYOUT OVERVIEW

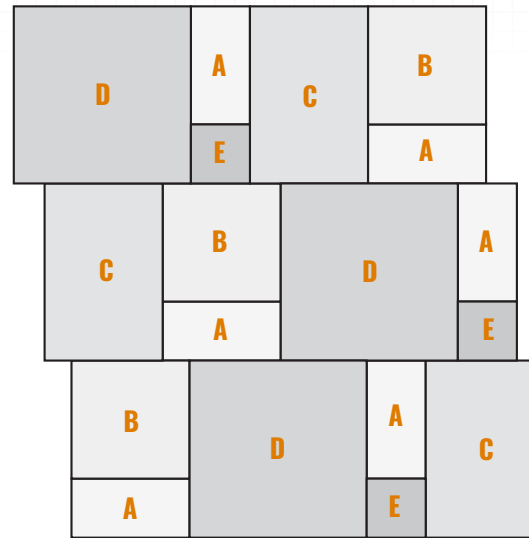


LINEAR PATTERN

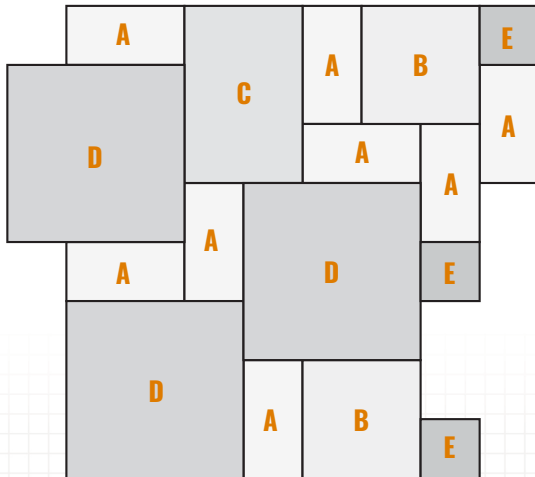


MODULAR PATTERN



Earthblend




Charcoal



Natural Grey



Granite



Casey-Mix



Sand-Charcoal

DE-ICING SALT DURABILITY MASS LOSS (max.):

225 g/m² after 28 cycles, or 500 g/m² after 49 cycles

UNIT SIZES PALLET LAYOUT

A: 4 x 8 in. (98 x 198 mm)

2 in. (60 mm):
6 lbs (2.7 kg) +/-

3 in. (80 mm):
8 lbs (3.6 kg) +/-



B: 8 x 8 in. (198 x 198 mm)

2 in. (60 mm):
12 lbs (5.4 kg) +/-

3 in. (80 mm):
16 lbs (7.2 kg) +/-



C: 8 x 12 in. (198 x 298 mm)

2 in. (60 mm):
18 lbs (8.0 kg) +/-

3 in. (80 mm):
24 lbs (10.7 kg) +/-



D: 12 x 12 in. (298 x 298 mm)

2 in. (60 mm):
28 lbs (12.5 kg) +/-

3 in. (80 mm):
37 lbs (16.6 kg) +/-



E: 4 x 4 in. (98 x 98 mm)

2 in. (60 mm):
3 lbs (1.3 kg) +/-

3 in. (80 mm):
4 lbs (1.8 kg) +/-



DIMENSIONAL TOLERANCES:

Meets the requirements of
CSA A231.2 Concrete Pavers

Length: -1 to +2 mm Width: -1 to +2 mm

Height: -3 to +3 mm

PHYSICAL PROPERTIES:

Meets the requirements of CSA A231.2 Concrete Pavers

Compressive Strength: Min. 50 MPa @ 28 Days

Absorption (%): 5.5% Maximum @ 28 Days

Freeze/Thaw: Not exceed 1% weight loss

ADDITIONAL INFORMATION:

Available in smooth top and stone textured surface in 60 mm and 80 mm thickness.

Pallet: 10 Layers for 60 mm; 8 Layers for 80 mm

Layer Area: 10.3 sq.ft

Layer Weight: 287 lbs (130.2 kg) for 60 mm; 383 lbs (173.7 kg) for 80 mm