




Casey Concrete Ltd. 198 x 298 mm (8 x 12 in.) BORDER STONE

caseyltd.ca

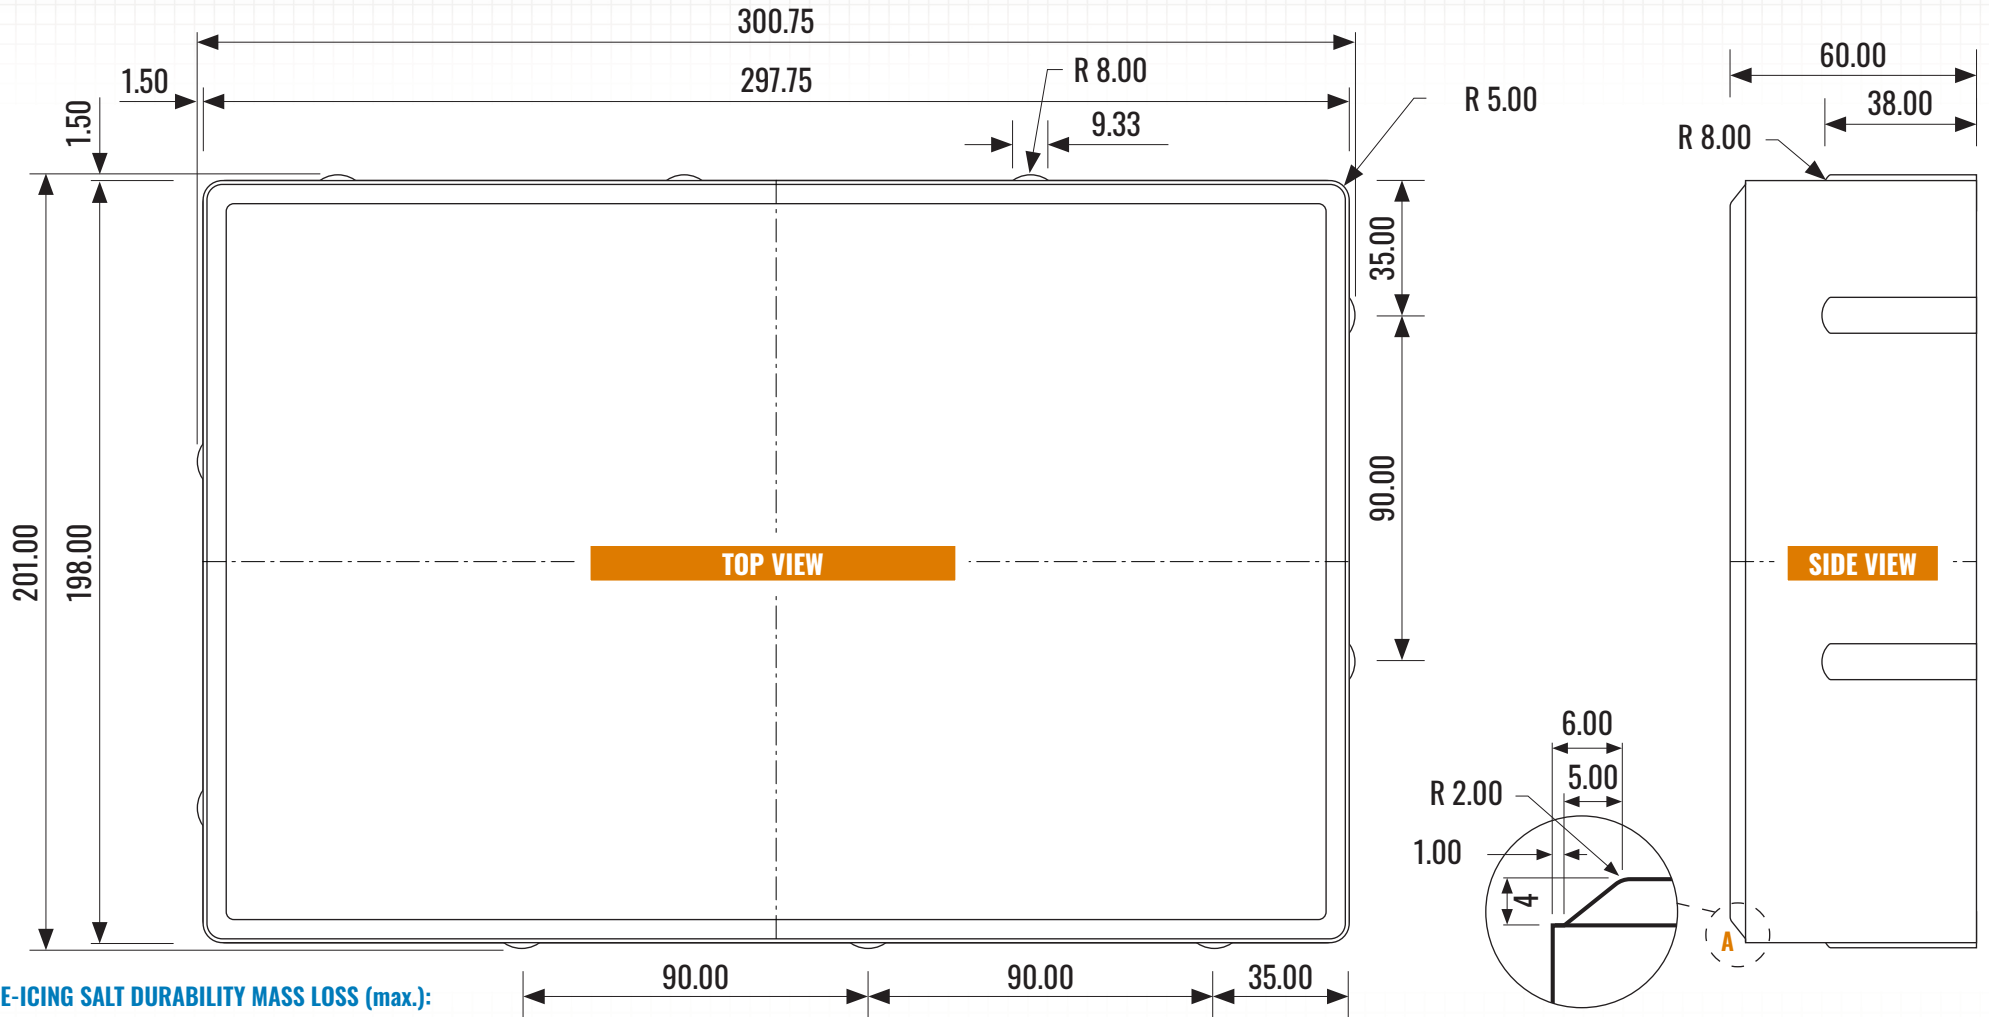

DETAIL "A" SCALE 2.9:1
ROTATED 90°

DE-ICING SALT DURABILITY MASS LOSS (max.):
225 g/m² after 28 cycles, or 500 g/m² after 49 cycles

PLEASE NOTE:

Products are made from natural material sources and therefore colour variations are common. Efflorescence is also a common occurrence with all concrete and concrete products. Efflorescence does not affect the quality of the product and will fade over time or can be removed with cleaning products.

AVAILABILITY:

Available in smooth and stone textured top surface
Available in 60 mm and 80 mm thickness

PACKAGING

Pieces Per Pallet:	160 (60 mm); 128 (80 mm)
Weight Per Piece:	60 mm 8 kg (18 lbs) – 80 mm 10.7 kg (24 lbs)
Weight Per Pallet:	60 mm 1280 kg (2820 lbs)
Weight Per Pallet:	80 mm 1365 kg (3010 lbs)
Coverage Per Pallet:	103.3 sq. ft (60 mm); 82.6 sq. ft (80 mm)

DIMENSIONAL TOLERANCES:

Meets the requirements of CSA A231.2 Concrete Pavers
 Length: -1 mm to +2 mm
 Width: -1 mm to +2 mm
 Height: -3 mm to +3 mm

PHYSICAL PROPERTIES:

Meets the requirements of CSA A231.2 Concrete Pavers
 Compressive Strength: Min 50 MPa @ 28 Days
 Absorption (%): 5.5% Maximum @ 28 Days
 Freeze/Thaw: Not exceed 1% weight loss

