

Tip #3

Usage of
_resource() API.

Swipe next >


How to use this tip?



Use **`_resource()`** API in the script/scenario file, **while doing a distributed run.**

```
sahi code
```

```
_resource("data.csv")
```

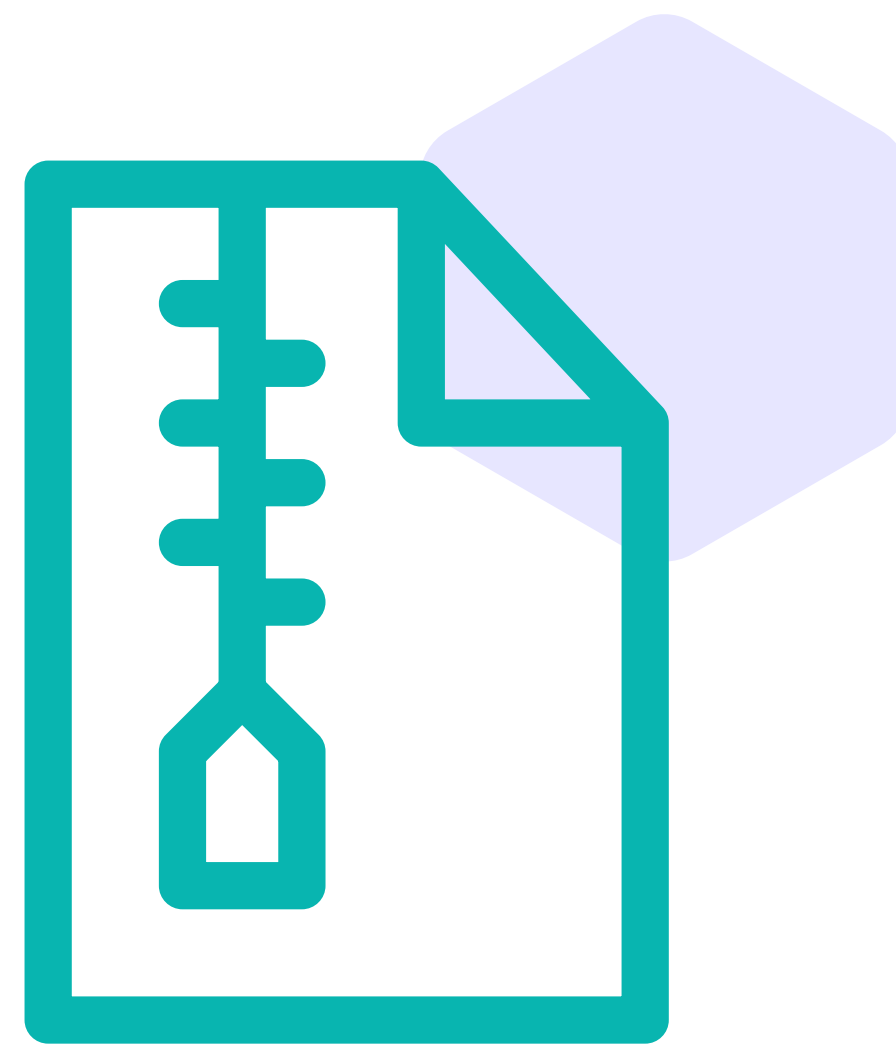

While doing a distributed run, **only the script/scenario in a suite will be zipped and sent to the nodes.**



Other files(.csv,.sah, etc) that take a part in the script/scenario **need to be included** explicitly using `_resource()` API, otherwise, it will show an error.

```
sahi code
```

```
_resource("utils.sah")
```



Use a relative path instead of a full path, as the sahi installation path changes from node to node.

sahi code

```
_resource("C:/Users/sahipro/SahiPro/userdata/scripts/testProject/utils.sah"); ❌
```

```
_resource("testProject/utils.sah"); ✅
```



Do not use variables
in the `_resource()` API.

sahi code

```
var $dataFile = "data.csv";
```

```
_resource($dataFile); ❌
```

```
_resource("data.csv"); ✅
```