


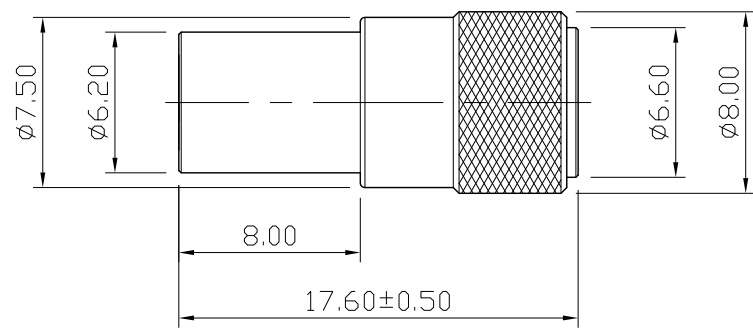


No.	DATE	DESCRIPTION	REV	REMARK : RoHS REQUIREMENT APPLIED (符合RoHS)	DATE	DRAWING NO.
-----	------	-------------	-----	---	------	-------------



Electrical Characteristic:

1. Impedance: 50 ohm
2. Frequency Range: DC~6 GHz
3. VSWR: 1.20 max.
4. Power Rating: 1 Watt average@20°C




S 1 : 1

8	cover	1	brass	gold	
7	solder tab	1	brass	none	
6	resistor	1	aluminum	none	
5	contact pin	1	beryllium copper	gold(3u")	
4	insulator	1	PTFE	white	
3	body	1	brass	gold	
2	C ring	1	beryllium copper	none	
1	shell	1	brass	gold	
NO.	Description	Unit	Materials	Finish	Drawing No.

DIMENSIONS ARE IN MILLIMETERS
UNLESS OTHERWISE SPECIFIED
TOLERANCES
(一般公差)
0.5~6 = ±0.2
>6~30 = ±0.4
>30~120 = ±0.6
>120~315 = ±1
>315~1000 = ±1.6
ANGLES(角度) = ±5°

CHECKED

DRAWN
Jordan
DATE
2019. 01. 21



雅鈦企業有限公司
Aec Connectors Co., Ltd.

TITLE
SMB TERMINATOR

DRAWING NO.
SB-2001GTG-SH0015

FILE NO. DRAWING\RFBS\SB-2001GTG-SH0015