

RIG OVERVIEW

- Rating 1,500HP
- Hook Load 750,000 lbs
- Drive DC Electric
- Year 2007 - Refurb. 2019

MAST

- Type Cantilever
- Height 142 ft
- Hook Load 750,000 lbs

SUBSTRUCTURE

- Type Slingshot
- Height 22 ft
- Clearance 18 ft
- Load Capacity 750,000 lbs
- Setback Capacity 400,000 lbs
- BOP Hoist 30 Ton

DRAWWORKS

- Make / Model NOV 110UE
- Power 1,500HP
- Drive DC Electric
- Drilling Line 1-1/4"
- Auxiliary Brake Baylor 6032

TOP DRIVE


- Make / Model CANRIG 8050E AC
- Load Capacity 500 Ton

ROTARY TABLE

- Make / Model American Block
- Size 27-1/2"

POWER GENERATION

- Engine Type CAT 3512C
- Horsepower 3ea. 1,600 HP
- Generator Type CAT SR4
- Generator Rating 3ea. 1,500 kVA
- SCR Unit IEC System LLC (4,500 kVA)

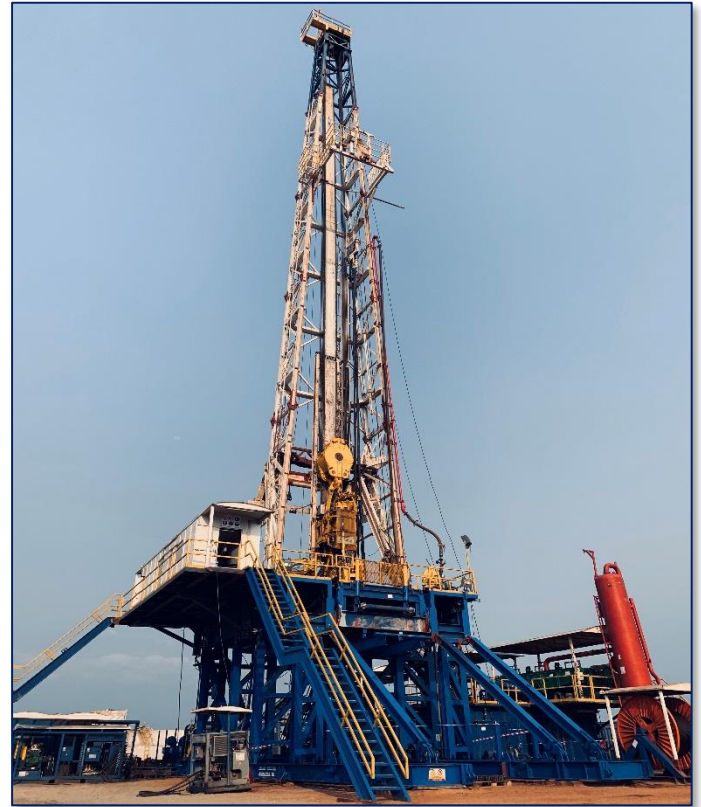

MUD SYSTEM

- Type 2x HHF T1600 / 1x Nat 10-P130
- Horsepower 2x 1,600HP / 1x 1,300HP
- Pressure 5,000 psi
- Shale Shakers 3x Derrick FLC 503
- Mud Cleaner 1x Derrick FLC 503
- Active Tanks 1,000 bbl
- Reserve Tanks 500 bbl

WELL CONTROL

- Annular BOP 13-5/8" - 5,000 psi
- Single BOP 13-5/8" - 5,000 psi
- Double BOP 13-5/8" - 5,000 psi
- Accumulator Unit Type 80, 6 Stations, 3,000psi
- Choke Manifold 3-1/8" - 5,000 psi

ADDITIONAL FEATURES

- Iron Roughneck Blohm & Voss
- Skidding System N/A
- Auto Catwalk N/A
- Others N/A