

Delford Series 620 Print & Apply

Flexible in-line labelling

aew delford
systems



Features and Benefits

- Variable and pre-printed labelling capability for maximum flexibility.
- Multiple label applicators.
- Choice of speeds – 60 or 200 packs/min.
- High resolution – 12dot/mm printing.
- Available as free standing system or modular unit.
- Direct chemi-thermal or thermal transfer print options.
- Fully programmable – up to 1000 label formats.
- Off-line graphic software and formatting.
- Label rotation facility.

All AEW Delford Systems machines carry CE certification.

Integrated Systems

The **Delford Series 620 Print & Apply** can operate as a stand alone machine or it can be integrated with a range of manual or automatic production lines.

For further information please logon to:
www.aewdelford.com

AEW Delford Systems wide range of Weigh Price Labellers and label applicators includes the **Series 620 Print & Apply** – an efficient means of providing flexible, high quality in-line labelling.

Ideal for food applications, such as bakery, meat and ready meals, where a varying range of packaged products requires ever-changing label information, the **Series 620** can be configured to suit individual customer needs.

The system is available in two models – 60 packs/min and 200 packs/min – subject to label size and print requirements.

Labelling heads can be conveyor-mounted or free-standing with top labelling or under labelling options, applying multiple labels to each pack with a mix of pre-printing and variable-printing functions.



Label print quality is excellent, with 12 dot/mm resolution direct chemi-thermal or thermal transfer printing technology. All recognised barcode configurations can be printed and comprehensive off-line graphic software allows special logos and bitmap images to be incorporated into labels.

The **Series 620 Print & Apply** is fully programmable and easy to use, with a 1000 label comformat memory accessed via an integral keypad with visual display interface. It can be operated to stand-alone via a floppy disk interface or networked by remote RS232 or RS485 connection.



Delford Series 620 Print & Apply

Flexible in-line labelling

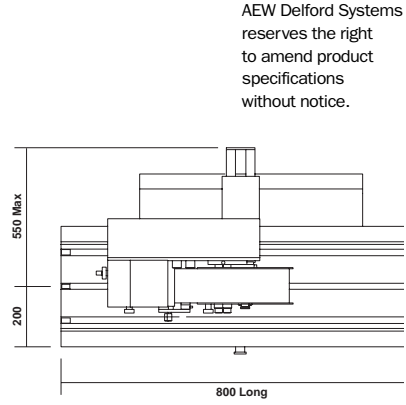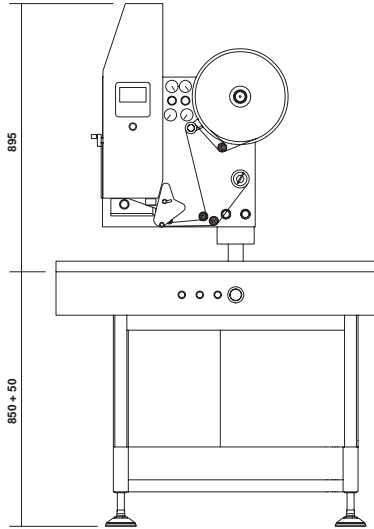

AEW Delford Systems reserves the right to amend product specifications without notice.



Up to 1000 label conformats can be accessed or edited via the integral keypad.

Agent/Distributor

Technical Information

Labelling

- High resolution printing via 12 dot/mm print head
- Extensive independent label fields
- Full EAN barcode capability
- Wide range of character font styles
- 300mm capacity label reel
- Minimum label size: 30mm x 30mm
- Maximum label size: 110mm wide x 150mm long subject to model, throughput speed and printing
- Rotating applicator by comformat

General

- 60 or 200 ppm subject to selected label size and model
- Left or right hand models
- Free standing or conveyor mounted
- Ability to download via floppy disk or RS232 connection.
- Unlimited graphic and character printing through the use of bitmaps

Services

- 230/110V +/-10%
- 1 phase 50-60Hz
- Compressed air: 100 l/min @ 6 bar

Delford Sortaweigh Ltd
Main Road, Dovercourt,
Harwich CO12 4LP, UK
Tel: +44 (0) 1255 241000
Fax: +44 (0) 1255 241155
E-mail: harwich@aewdelford.com

Delford Sortaweigh Inc.
PO Box 2528,
Russellville, AR 72811, USA
Tel: 479 968 8160
Fax: 479 968 8115
E-mail: arkansas@aewdelford.com

www.aewdelford.com