

Generator Model

APK-P2050

Generator Rating		Prime	Standby
Power	kVA	1864	2050
Power	kW	1491	1640
Current	A	2700	2971
Standard Voltage	V	400/230 3 Phase	
Revolution Per Minute	R.P.M.	1500	
Rated at power Factor	Cos Phi	0.8	

Standard Features

- 4 Stroke, 1500 RPM, water-cooled heavy-duty diesel engine
- Automatic or manual start with built in protection system
- Flexible oil pipes and oil drain valve
- Pre-heater and water heater
- Lubrication oil and anti-freeze
- 4 Pole, synchro type, single bearing, brushless alternator
- Fully rated batteries and cables
- Base or roof lifting points
- Bunded base fuel tank
- Industrial rated silencer
- Electronic battery charger
- EPO (Emergency Push Off)
- 3 or 4 pole output breaker
- Electrical wiring diagram
- User manual and operating manual

Optional Features

- 3 or 4 pole Automatic Transfer panel (ATS) electrically and mechanically interlocked
- Remote alarm volt free contacts
- Remote monitoring (RS232 / RS485)
- G99 Operation
- Battery isolator
- Canopy colour
- Low noise canopy down to 65dBA
- Parallel operation
- Residential silencer
- Air flow variations
- Extended fuel tank
- Remote fuel tank with/without automatic day tank fill system

Additional Services Available

- Site surveys
- Hiab delivery
- Generator positioning
- Air handling and exhaust extension supply and installation
- Commissioning
- Maintenance contract

Prime Power: Supplying of electrical power at variable load for an unlimited number of hours in the event of normal utility power failure according to ISO85281. 10% over load capability is available.

Stand by Power: Supplying of electrical power at variable load, in the event of normal utility power failure according to ISO85281. This rating is maximum power, no overload capability is available.

Engine Specification

Brand		PERKINS
Model		4016TAG1A
Engine Power Stand By	(kWm / hp)	1690/2283
Revolution Per Minute	(R.P.M)	1500
Total Displacement	(L)	61.12
Cylinders Orientation		16 V type
Bore x Stroke	(mm x mm)	160 x 190
Compression Orientation		13.6:1
Governor Type		Electronic
Aspiration System		Turbo AAC
Injection		Direct
Cooling		Water Cooled
Electrical System	(VDC)	24
Lub-Oil Capacity	(L)	237
Engine Coolant Capacity	(L)	316
Fuel Tank Capacity	(L)	NA
Maximum Exhaust Temperature	(°C)	460
Maximum Exhaust Gas Flow	(m3/min)	353
Maximum Allowed Back Pressure	(kPa)	34
Cooling Air Flow	(m3/min)	2394
Fuel Consumption 50%	(L/h)	185
Fuel Consumption 75%	(L/h)	277
Fuel Consumption 100%	(L/h)	383

Alternator Specification

Standard Voltage	(V)	400/230
Frequency	(Hz)	50
Stationary Voltage Regulation	(±)	1%
Short Circuit Current		>300%
Insulation		H/H
Protection		IP 23
Efficiency	(%)	96
Overloading		110% For 1 Hour
Power Factor	(cos Phi)	0.8
Total Harmonic Distortion rate		THF <2%
Connection Type		Star
Number of poles		4
Number of Bearings		Single


www.abilitypower.co.uk

Dimensions with canopy

Length (L)	mm	12000
Height (H)	mm	3700
Width (W)	mm	2400
Wet Weight	kg	15000
Fuel Tank Capacity	L	External

Dimensions without Canopy

Length (L)	mm	6000
Height (H)	mm	3500
Width (W)	mm	2400
Wet Weight	kg	12300
Fuel Tank Capacity	L	NA

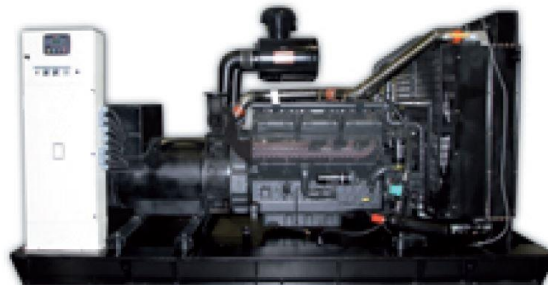

Please note above images are an example actual unit may vary

Standard D500 Control Panel Features

- | | | |
|--|--|--|
| <ul style="list-style-type: none"> • Diesel and gas genset support • 400Hz operation support • 400 event logs, full snapshot • All parameters front panel editable • 3 level configuration password • 128x64 graphical LCD display • Downloadable language • Waveform display of V & I • Harmonic analysis of V & I • Synchro scope & check synch • Allows closed transfers • 16Amp MCB & GCB outputs • 8 configurable digital outputs • Outputs expandable to 40 • 4 configurable analogue inputs • Both CANBUS-J1939 & MPU • 3 configurable service alarms • Multiple nominal conditions | <ul style="list-style-type: none"> • Multiple automatic exerciser • Weekly operation schedule • Dual mutual standby with equal aging of gensets • Manual "speed fine adjust" on selected ECUs • Automatic fuel pump control • Disable protections feature • Excess power protection • Reverse power protection • Overload IDMT protection • Load shedding, dummy load • Multiple load management • Current unbalance protection • Voltage unbalance protection • Fuel filling & fuel theft alarms • Battery back-up real time clock • Idle speed control • Battery charge run enabled | <ul style="list-style-type: none"> • Contactor & MCB drive • 4 quadrant genset power counters • Mains power counters • Fuel filling counter • Fuel consumption counter • Modem & Ethernet diagnostics configurable through USB, RS-485, Ethernet and GPRS • Free configuration program • Allows SMS controls • Ready for central monitoring • Ethernet and GPRS • Mobile genset support • Automatic GSM geo-location • GPS connectivity (USB & RS232) • Dynamic DNS support • Easy USB firmware upgrade • IP65 rating with standard gasket |
|--|--|--|